



Adapt Collection

Mannington
COMMERCIAL



Cover: Pebble (Modular) - Mushroom 82601, Stream (Modular) - Mushroom 82601
Above: Stream (Modular) - Stacked Stone 14602
Installation - Vertical Ashlar



Pebble (Modular) - Rain Cloud 34604
No Reservations (LVT) - Inhibition NR101
Carpet Installation - Vertical Ashlar

Carpet Performance

Our broadloom and modular carpets are constructed with premium raw materials and withstand rigorous testing to provide you with flooring that will meet the needs of every commercial space.



Proven by Third-Party Testing

Every carpet we make at Mannington Commercial is third-party tested and proven to exceed industry standards in appearance retention, texture retention, fire safety factors and static generation, and our modular carpet exceeds industry standards in dimensional stability—so you can be sure that the carpet you specify will perform for years to come.

Easier to Maintain

- > The molecular strength of type 6,6 nylon delivers greater resilience against matting and resists abrasive wear, keeping carpet looking better longer.
- > XGUARD® Stain Resistant Technology provides long-term stain resistance for our space dye products.
- > ColorSafe® Bleach Resistant Technology resists color fade-out from bleach spills for our space dye products.
- > Moisture-barrier backings are built to withstand aggressive wet cleanings.

Backing Advantages

- > Infinity® 2 and rEvolve® II Modular backings provide exceptional performance with a moisture barrier as well as superior tuft bind and dimensional stability with a limited lifetime warranty.
- > rEvolve® II is a PVC-free modular backing. For additional backing options please visit our website.

Sustainable Solutions

- > Supported with third party verified EPDs and HPDs.
- > Infinity® 2 Modular and rEvolve® II backings are NSF/ANSI 140 Gold Certified and contain recycled content.
- > Recognizing the impact that the built environment can have on Earth's climate and health, Mannington Commercial is improving operations and offsetting cradle-to-gate embodied carbon by 105% on this collection, as part of our commitment to helping customers take positive action through their projects

TARR

- > Adapt was specifically designed with a minimum TARR rating of 3.0 for heavy use environments with substantial foot traffic. This includes conference rooms, open office areas and classrooms. Our TARR rating is tested and verified by an independent lab.


No Moisture Testing Required*

Solutions crafted for high-moisture conditions. Defeat moisture issues with carpet backings that do not require moisture testing*.

We have solutions for broadloom and modular carpet to make moisture worries evaporate. From backing options to adhesives to a dry installation system, explore solutions that defeat moisture concerns while enhancing the performance of your floor.

| | Infinity 2 Pressure Sensitive Adhesive | XpressStep™ Spray Adhesive | FreLock Tabs | Integra-2 Adhesive | Ultra Adhesive |
|--|--|----------------------------|--------------|--------------------|----------------|
| Infinity® 2 Modular Backing | ✓ | ✓ | ✓ | | |
| Infinity® 2 MG Modular Backing | ✓ | ✓ | ✓ | | |
| Infinity® 2 MG Cushion Modular Backing | ✓ | ✓ | | | |
| rEvolve® II PVC-Free Modular Backing | ✓ | | | | |
| Integra® HP Broadloom Backing | | | | ✓ | |
| UltraBac® RE Broadloom Backing | | | | | ✓ |

* Assumes intact vapor barrier, no standing water or stained concrete, no hydrostatic pressure, and for our broadloom backings (Integra® HP and UltraBac® RE) pH levels must never exceed 10. Please refer to our installation instructions for further details.

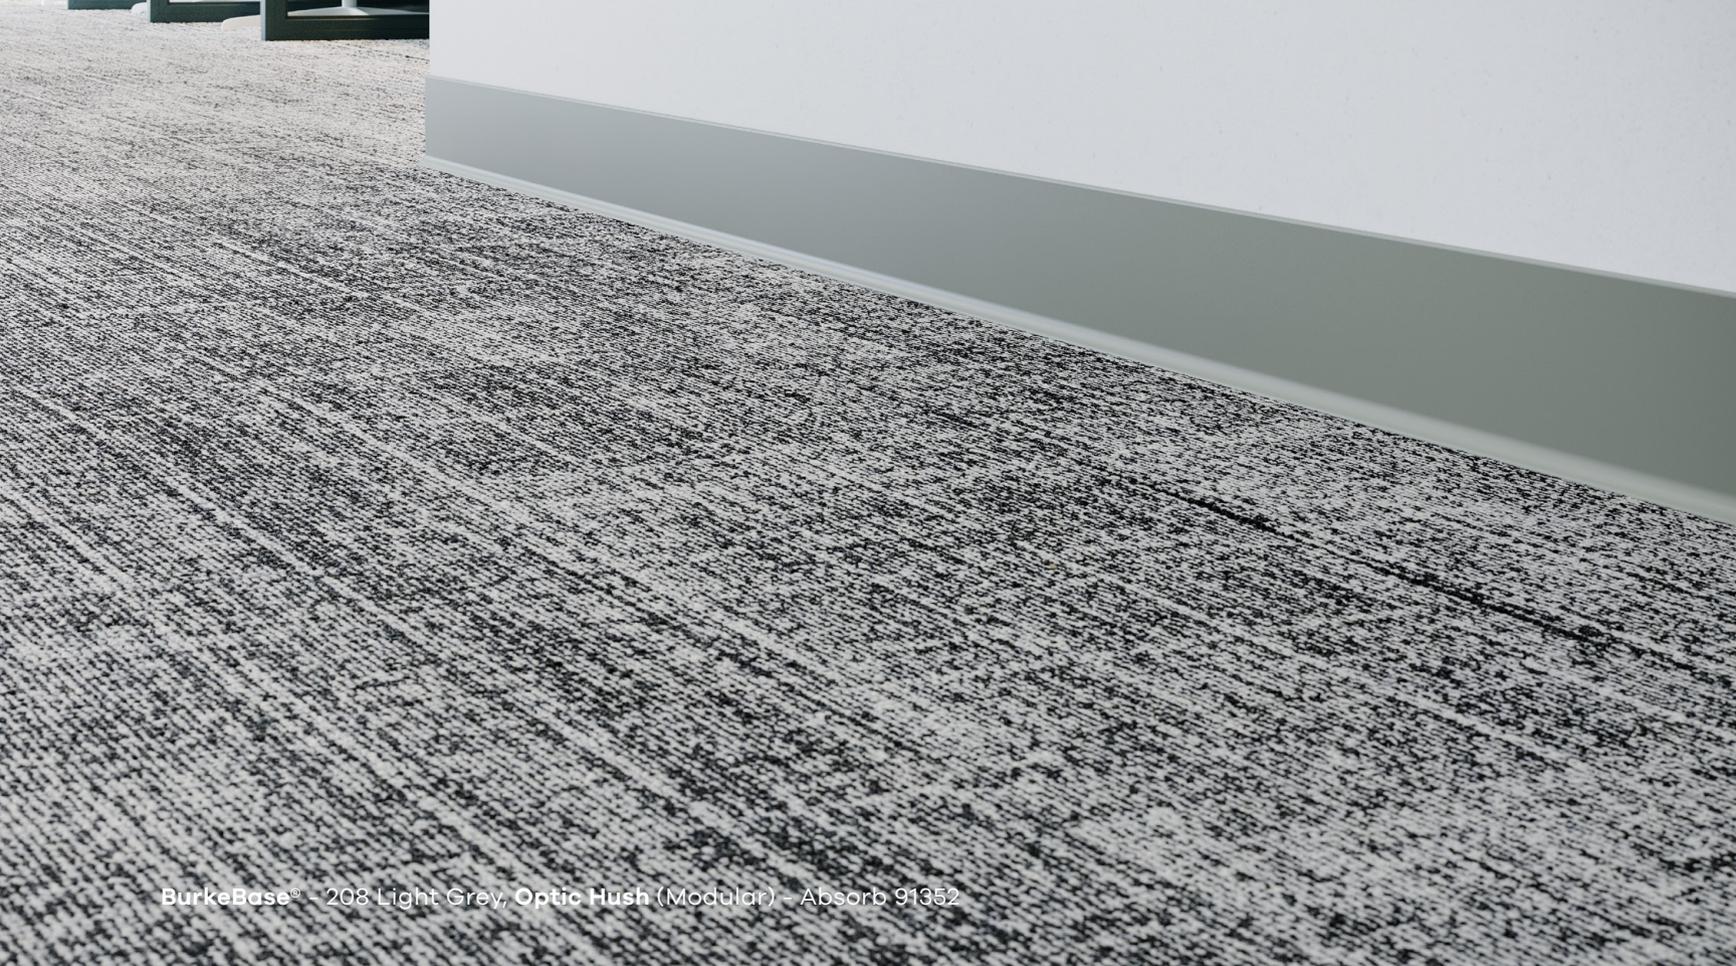

BurkeBase® - 208 Light Grey, Optic Hush (Modular) - Absorb 91352

| Available Profile Heights | BurkeBase® Premium TS Molded 1/8" | BurkeBase® Type TP 1/8" | BurkeBase® Type TV 1/8" | BurkeBase® Type TV .080" |
|---------------------------|-----------------------------------|---|---|--|
| | 4" (102 mm) 6" (152 mm) | 2.5" (64 mm) 4" (102 mm) 4.5" (114 mm) 6" (152 mm) | 2.5" (64 mm) 4" (102 mm) 4.5" (114 mm) 6" (152 mm) | 2.5" (64 mm) 4" (102 mm) 6" (152 mm) |
| | Coved | Coved or Toeless | Coved or Toeless | Coved or Toeless |

Warranty This product is backed by our Limited 5-Year Commercial Warranty.

Corners BurkeBase® Premium Type TS factory molded corners are available with 4" and 6" coved corners. Must be ordered at time of wall base order to ensure color match.

BurkeBase® Type TP/TV pre-formed corners are available in all profile heights. Must be ordered at time of wall base order to ensure color match.

Custom Colors Minimums apply.
Please make final selection for all colors from actual product samples.
For samples and information, visit manningtoncommercial.com or call 800.241.2262.

Adapt Collection

| Style | Pebble | Stream |
|--------------------------------------|--|---|
| Construction | Patterned Loop | Patterned Loop |
| Face Fiber | Type 6,6 Nylon | Type 6,6 Nylon |
| Dye Method | Solution | Solution |
| Gauge | 1/12 (47.24 per 10 cm) | 1/12 (47.24 per 10 cm) |
| Stitches Per Inch | 11.67 (45.94 per 10 cm) | 10.67 (42.01 per 10 cm) |
| Density | 5,355 (198.98 kg/m ³) | 5,054 (187.91 kg/m ³) |
| Pile Thickness | 0.121" (3.07 mm) | 0.121" (3.07 mm) |
| Weight | 18 oz/yd ² (610 g/m ²) | 17 oz/yd ² (576 g/m ²) |
| Backing Type | Infinity® 2 Modular, rEvolve® II (PVC-Free) Modular | Infinity® 2 Modular, rEvolve® II (PVC-Free) Modular |
| Sizes | 12" x 36" (30.48 cm x 91.44 cm) | 12" x 36" (30.48 cm x 91.44 cm) |
| Colors | 8 | 8 |
| Adhesive | Infinity 2 Adhesive | Infinity 2 Adhesive |
| Installation Method | Herringbone, Horizontal Brick Ashlar, Monolithic, Vertical Ashlar | Herringbone, Horizontal Brick Ashlar, Monolithic, Vertical Ashlar |
| Testing | | |
| Dimensional Stability (Aachen Test) | Passes | Passes |
| Electrostatic Propensity (AATCC 134) | Less than 3.0 kV | Less than 3.0 kV |
| Flooring Radiant Panel (ASTM E648) | Passes - Class 1; ≥ 0.45 watts/cm ² | Passes - Class 1; ≥ 0.45 watts/cm ² |
| Smoke Density (ASTM E662) | Passes - ≤ 450 | Passes - ≤ 450 |
| Methenamine Pill Test (ASTM D2859) | Passes | Passes |
| Hexapod (ASTM D5252) TARR | 3.0 | 3.0 |
| Environmental Data | | |
| NSF/ANSI 140 Certification | Infinity® 2 Modular - Gold, rEvolve® II Modular - Gold | |
| Recycled Content | Contains recycled content | |
| Indoor Air Quality | CRI Green Label Plus Certified | |
| Product Declarations | Third Party Verified EPD, HPD | |
| Carbon Offset | 105% Cradle to Gate (A1 - A3), visit website for more information | |
| LEED | May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials | |
| mindful MATERIALS | Visit mindfulmaterials.com for current transparency information | |
| Manufacturing | Calhoun, GA (USA) - ISO 14001 Registered | |
| Warranty | | |
| | Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty | |

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.v
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.