



Spacia® Xpress Collection: 2.5mm & 5mm

Mannington
COMMERCIAL



Get the flooring you need in a flash with our stunning Xpress selection, crafted for any space.

In-stock availability for:

- Modular carpet
- LVT
- Resilient sheet
- Rubber wall base
- Rubber stair treads
- Rubber tile

105% carbon offset cradle to gate (A1-A3)

Made in the USA

For more information, contact your Mannington representative or call us at 800-241-2262.

manningtoncommercial.com/xpress

UP TO
500

SQUARE
YARDS FOR
ENTRYWAY
SYSTEMS

UP TO
1,000

SQUARE
YARDS FOR
MODULAR
CARPET

UP TO
10,000

SQUARE FEET
FOR LVT

UP TO
2,000

SQUARE
YARDS FOR
RESILIENT
SHEET

View our Rubber Xpress options





Cover: Stone – Gallery Concrete (18" x 18"), **Wood** – Lancaster Oak (7.25" x 48")
Above: Stone – Gibson (18" x 18")



Abstract – Sabiro Stone (18" x 18")

Spacia® Xpress 2.5mm & 5mm

At Mannington Commercial, we proudly manufacture the vast majority of our LVT right here in North America, including Spacia Xpress 2.5mm & 5mm. By controlling the process from start to finish, from design to material sourcing to delivery, we are able to bring you hard surface flooring products that are optimized to fit your needs.

Crafted by the Industry Leader in LVT

2.5 & 5.0 mm Thickness

Inspired Design & Outstanding Performance

- Pair abstract, wood, and stone visuals with any Mannington Commercial collection to create a cohesive, high-performing design.

Quantum Guard Elite®

- Best in class abrasion resistance
- Easy maintenance
- Stain resistance that endures

15-Year Quantum Guard Elite® warranty

105% Carbon Offset

- Recognizing the impact that the built environment can have on Earth's climate and health, Mannington Commercial is improving operations and offsetting cradle to gate embodied carbon by 105% on our domestically manufactured flooring products as part of our commitment to helping customers take positive action through their projects.



Made in the USA





Wood – Eden Oak (7.25" x 48")

CHOOSING THE RIGHT LVT CONSTRUCTION

	2.5 mm LVT	5.0 mm LVT
Acoustics (IIC Ratings)	50 IIC 6" slab with drop ceiling	54 IIC 6" slab with drop ceiling
Embodied Carbon	9.317 kg CO ₂ e/yd ² Uses 2x less raw materials than 5.0 mm Uses 2.5x less energy than 5.0 mm	19.734 kg CO ₂ e/yd ² Uses 2x more raw materials than 2.5 mm Uses 2.5x more energy than 2.5 mm
Sustainability	105% Carbon Offset cradle to gate (A1-A3) +Vantage Vinyl Verified Silver Recyclable at end of life	105% Carbon Offset cradle to gate (A1-A3) +Vantage Vinyl Verified Silver Recyclable at end of life
Carpet Transition Options	Use Mannington Commercial Fusion Strip to transition to carpet	Transitions to carpet without added installation accessories
Installation Considerations	Approved for Heavy Rolling Loads Shows more subfloor irregularities than 5.0 mm Glue down only	Approved for Heavy Rolling Loads Shows less subfloor irregularities than 2.5 mm Glue down & perimeter glue
Warranty	15-Year Commercial 15-Year Quantum Guard Elite®	15-Year Commercial 15-Year Quantum Guard Elite®
Origin	Proudly Made in USA	Proudly Made in USA





Abstract – Satin Weave (18" x 18")

Fusion

Rubber Transition Strip

When carpet and LVT adjoin, there are often differences in product heights. Eliminate the problem with Fusion Rubber Transition Strips. Place Fusion Strips wherever carpet tile meets LVT to create a subtle transition with minimal visual interruption. Fusion Strips are budget friendly and easy to install, resulting in a more attractive, high-performance floor.

Product Information

- 2.125" reduction width, 6' length
- 20 pieces of 6' sections per carton (120 lin ft)

5 Xpress Colors


Platinum Metallic 117



Gray Beige 209



Charcoal 217



BlackBrown 523





Black 701



Compact Mixed Flooring Reducer

Fusion Rubber Transition Strips provide a 6-7 mm reduction over 2.125 inches that are easy to install.

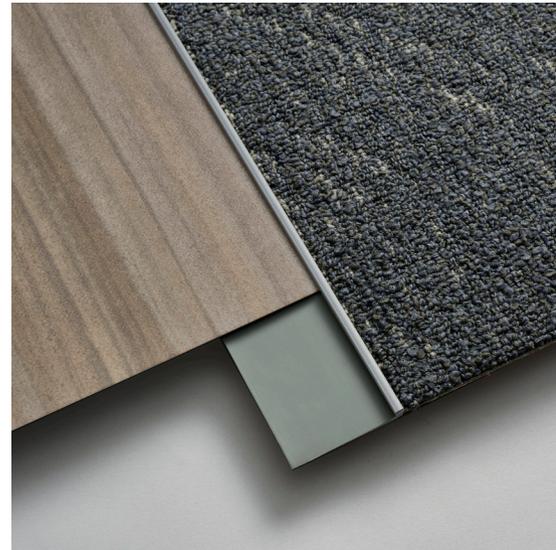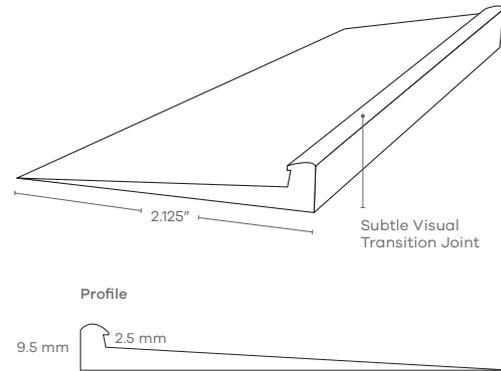

Environmental Attributes

- FloorScore Certified; CDPH v 1.1 - 2010
- May contribute to LEED credits
- mindfulMaterials

Spacia Xpress Collection | 2.5 mm

Product Name	Product Code	Surface Finish - Ceramic	Surface Finish - Tick	Surface Finish - Barnwood	18" x 18" (457 x 457 mm)	7.25" x 48" (184 x 1219 mm)
ABSTRACT 2.5 mm						
Linen Weave	SS5A3800	•			•	
Mirus Cotton	SS5A6110	•				•
Mirus Feather	SS5A6120	•				•
Sabiro Stone	SS5A4706	•			•	
Satin Weave	SS5A3805	•			•	

STONE 2.5 mm						
Ceramic Flint	SS5S2594	•			•	
Ceramic Light	SS5S1565	•			•	
Gallery Concrete	SS5S3071	•			•	
Gibson	SS5S2603	•			•	
Kingham Stone	SS5S1594	•			•	

WOOD 2.5 mm						
Dusky Walnut	SS5W2542		•			•
Eden Oak	SS5W1010		•			•
Featured Oak	SS5W2533		•			•
Lancaster Oak	SS5W1100		•			•
Nordic Oak	SS5W2550		•			•
Rustic Barn Wood	SS5W2513			•		•
Rustic Limed Wood	SS5W2650		•			•
Warm Cherry	SS5W2506		•			•
Worn Ash	SS5W2539			•		•
Windsor Oak Ashen	SS5W12372		•			•

Spacia Xpress Collection | 5 mm

Product Name	Product Code	Surface Finish - Ceramic	Surface Finish - Tick	Surface Finish - Barnwood	18" x 18" (457 x 457 mm)	7.25" x 48" (184 x 1219 mm)
ABSTRACT 5 mm						
Linen Weave	S55A3800	•			•	
Mirus Cotton	S55A6110	•				•
Mirus Feather	S55A6120	•				•
Sabiro Stone	S55A4706	•			•	
Satin Weave	S55A3805	•			•	

STONE 5 mm						
Ceramic Flint	S55S2594	•			•	
Ceramic Light	S55S1565	•			•	
Gallery Concrete	S55S3071	•			•	
Gibson	S55S2603	•			•	
Kingham Stone	S55S1594	•			•	

WOOD						
Dusky Walnut	S55W2542		•			•
Eden Oak	S55W1010		•			•
Featured Oak	S55W2533		•			•
Lancaster Oak	S55W1100		•			•
Nordic Oak	S55W2550		•			•
Rustic Barn Wood	S55W2513			•		•
Rustic Limed Wood	S55W2650		•			•
Warm Cherry	S55W2506		•			•
Worn Ash	S55W2539			•		•
Windsor Oak Ashen	S55W12372		•			•

Defeat Damp Spaces

Your job just got easier. With our comprehensive moisture solutions for LVT, you can defeat the most extreme high moisture conditions.

Best Solutions for:

Any Slab Condition

NO Moisture Testing Required – NO RH limit, NO Testing*

Adhesive

MoistureLoc

*** Conditions**

No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

Best Solutions for:

Slabs with Intact Vapor Barrier (Class B or better)

Quick pH Testing Required**

Adhesive

	pH
V-88	12
MoistureLoc	None
QuickStix® with Moisture Resistant Primer**	12

**** Conditions**

Intact Class B or better vapor barrier | No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

Best Solutions for:

Unknown Slab Conditions

Moisture Testing Required

Adhesive	RH%	MVER	pH
V-88	95	10	12
MoistureLoc	None	None	None
XpressStep LVT	98	10	12
QuickStix® with Premium Universal Primer (with IVB)	99	18	12
QuickStix® with Premium Universal Primer (No IVB)	95	10	12
V-95	85	5	9



QUANTUM GUARD®
elite

Success Is in Our Science



Quantum Guard Elite is a proven, patented technology that provides the ultimate solution for all aspects of LVT performance.

- Highest scratch resistance in the industry
- Engineered for best-in-class dimensional stability
- Superior impact resistance
- Cuts cleanly for highest quality installation
- Easy no-polish maintenance significantly reduces overall life cycle cost and total cost of ownership
- Advanced stain resistance

Outperforms in Scratch Resistance

Quantum Guard Elite


Leading Competitor

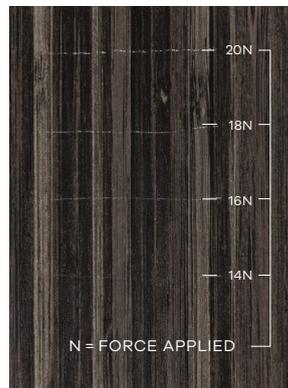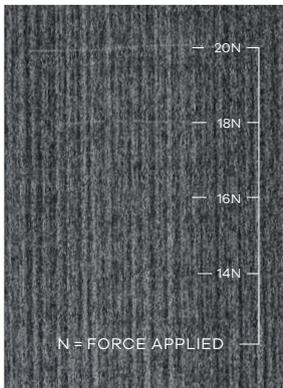

With a patented two-part wear layer and aluminum oxide infused top coat, Quantum Guard Elite offers superior scratch resistance vs. the leading competitor.

Complete Multi-Layered Protection



Quantum Guard Elite combines a hard wear layer and a flexible wear layer for superior durability with the added protection of our proprietary aluminum oxide technology.

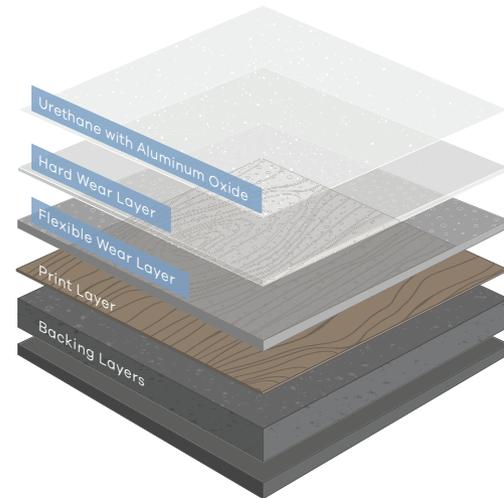

Best-in-Class Dimensional Stability

Quantum Guard Elite

Leading Competitor

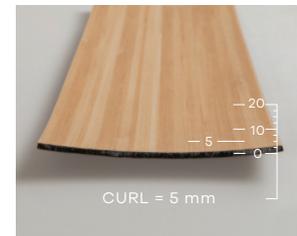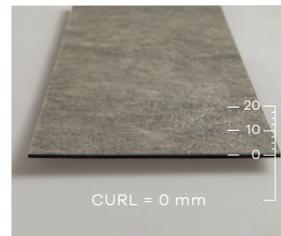

LVT with Quantum Guard Elite is fully engineered to offer the perfect balance of hardness and flexibility, which helps prevent product failures in commercial environments. (Products exposed to 80 °C for six hours.)

Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

Spacia® Xpress Collection: 2.5mm

Style	Abstract: 2.5mm	Stone: 2.5mm	Wood: 2.5mm
Construction	Luxury Vinyl Tile (Non-ortho Phthalate)	Luxury Vinyl Tile (Non-ortho Phthalate)	Luxury Vinyl Tile (Non-ortho Phthalate)
Classification	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
Overall Thickness	0.098" (2.5 mm)	0.098" (2.5 mm)	0.098" (2.5 mm)
Wear Layer Thickness	20 mil (0.51 mm)	20 mil (0.51 mm)	20 mil (0.51 mm)
Wear Layer	Quantum Guard Elite®	Quantum Guard Elite®	Quantum Guard Elite®
Edge Treatment	Micro-beveled	Micro-beveled	Micro-beveled
Colors	5	5	10
Sizes	7.25" x 48" (184 x 1219 mm) 18" x 18" (457 x 457 mm)	18" x 18" (457 x 457 mm)	7.25" x 48" (184 x 1219 mm)

Environmental Data

Rapidly Renewable Content	Contains 2% rapidly renewable resource content
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017
Product Declarations	Third Party Verified EPD, HPD
Carbon Offset	105% (Cradle to Gate (A1-A3); visit website for more information)
LEED	May Contribute to LEED Credits Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl™ Verified Silver

Warranty

Limited 15-Year Commercial Warranty
Limited 15-Year Quantum Guard Elite® Wear Warranty



View full collection specs.

Spacia® Xpress Collection: 5mm

Style	Abstract: 5mm	Stone: 5mm	Wood: 5mm
Construction	Luxury Vinyl Tile (Non-ortho Phthalate)	Luxury Vinyl Tile (Non-ortho Phthalate)	Luxury Vinyl Tile (Non-ortho Phthalate)
Classification	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
Overall Thickness	0.197" (5 mm)	0.197" (5 mm)	0.197" (5 mm)
Wear Layer Thickness	20 mil (0.51 mm)	20 mil (0.51 mm)	20 mil (0.51 mm)
Wear Layer	Quantum Guard Elite®	Quantum Guard Elite®	Quantum Guard Elite®
Edge Treatment	Micro-beveled	Micro-beveled	Micro-beveled
Colors	5	5	10
Sizes	7.25" x 48" (184 x 1219 mm) 18" x 18" (457 x 457 mm)	18" x 18" (457 x 457 mm)	7.25" x 48" (184 x 1219 mm)

Environmental Data

Rapidly Renewable Content	Contains 2% rapidly renewable resource content
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017
Product Declarations	Third Party Verified EPD, HPD
Carbon Offset	105% (Cradle to Gate (A1-A3); visit website for more information)
LEED	May Contribute to LEED Credits Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl™ Verified Silver

Warranty

Limited 15-Year Commercial Warranty
Limited 15-Year Quantum Guard Elite® Wear Warranty



View full collection specs.