


Burke Stairway Systems


Mannington
COMMERCIAL

A modern staircase with a glass railing and black nosing on a light-colored carpet. The railing is made of clear glass panels held together by silver metal brackets. The stairs have a light-colored carpet with black nosing on the edges of each step. The background shows a bright, open-plan office space with a checkered floor and yellow and grey seating.

Cover: ColorSpec® Square - Abyss 045
Above: Linear Series Stair Nosing - Black 701

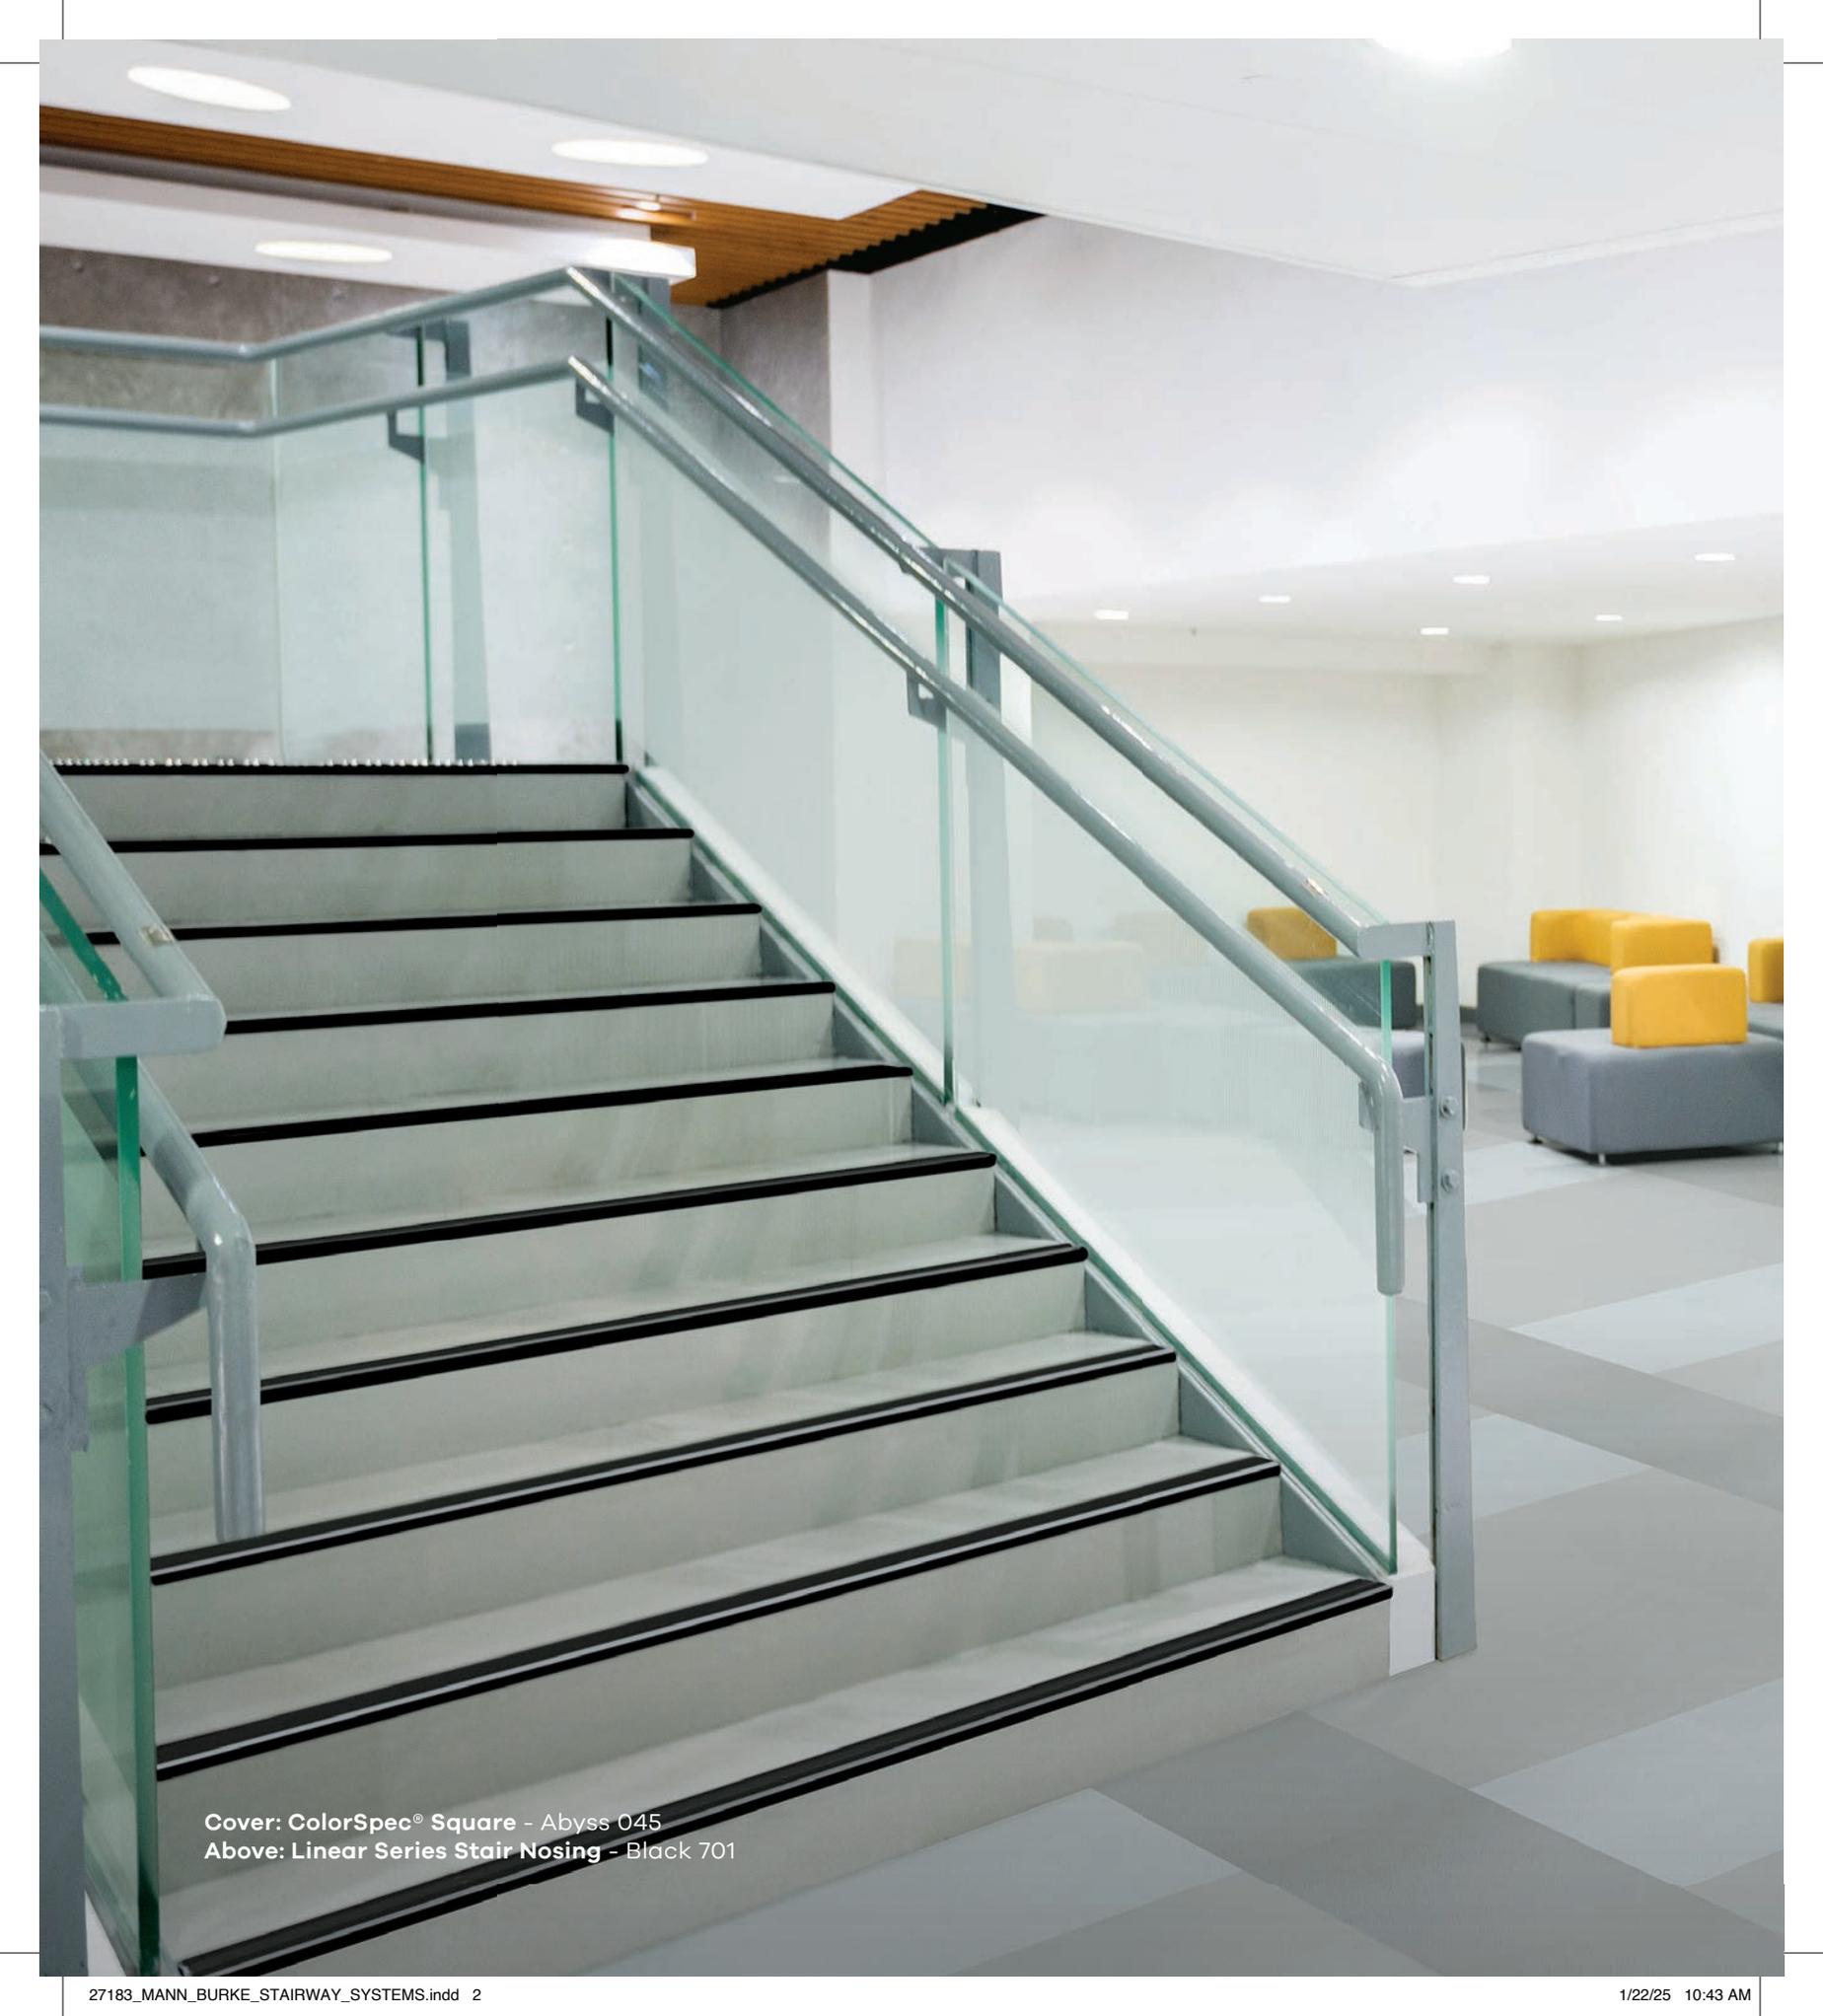


ColorSpec® Stair Treads & Risers

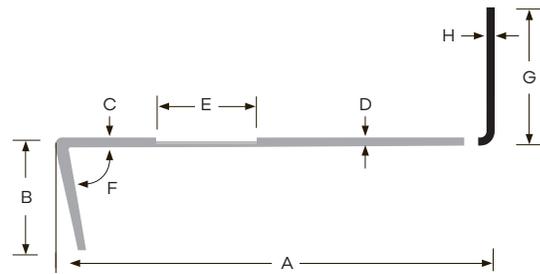


Risers are available in coordinating colors.

Square Profile | Square Nose & Visually Impaired*

A = 13"
B = 1.813"
C = .18"
D = .13"
F = 80°
G = 7"
H = .125"

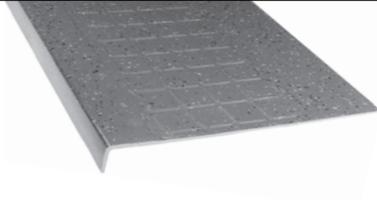

A = 13"
B = 1.813"
C = .18"
D = .13"
E = 2"
F = 80°
G = 7"
H = .125"

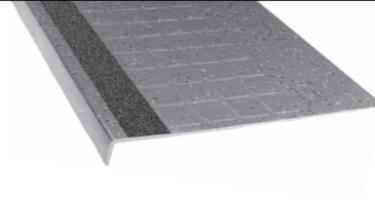


Sculptured Profile | Square Nose & Visually Impaired*

A = 13"
B = 1.813"
C = .18"
D = .13"
F = 80°
G = 7"
H = .125"



** Refer to architect folder for actual texture and color*

A = 13"
B = 1.813"
C = .18"
D = .13"
E = 2"
F = 80°
G = 7"
H = .125"

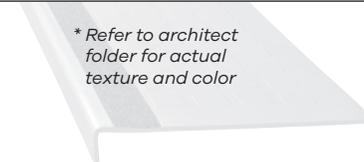

** Refer to architect folder for actual texture and color*

Technical Data

PRODUCT	LENGTHS	VI STRIPS	PROFILE
1/8" Square Profile	3', 4', 5', 6'	Optional	Square
1/8" Sculptured Profile	3', 4', 5', 6'	Optional	Sculptured
1/8" Risers (7" height w/toe)	3', 4', 5', 6'	n/a	none
1/8" Risers (6" Cove)	4'	n/a	none
1/8" Skirting (10" toeless base)	4'	n/a	none

Applicable Standards: Treads: ASTM F2169, Type TS, Class 2, Group 1 & 2

Risers & Skirting: ASTM F1861, Type TS, Group 1, Style A & B

Indentation Resistance: ASTM F970 - .000" residual indent at 600 PSI

Flame Resistance: ASTM E648, Class 1


Nose filler NOT REQUIRED. The superior construction of our ColorSpec Type TS Rubber stair treads do not require nose filler at installation.




ColorScape® Stair Treads & Risers

Round Profile | Square Nose & Visually Impaired*

A = 13"
B = 1.813"
C = .18"
D = .13"
F = 80°

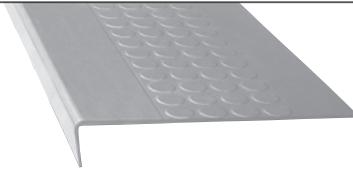


A = 13"
B = 1.813"
C = .18"
D = .13"
E = 2"
F = 80°

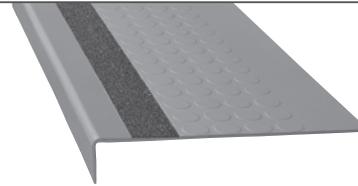


Square Profile | Square Nose & Visually Impaired*

A = 13"
B = 1.813"
C = .18"
D = .13"
F = 80°



A = 13"
B = 1.813"
C = .18"
D = .13"
E = 2"
F = 80°

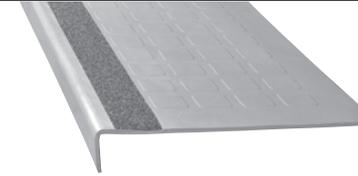

Sculptured Profile | Square Nose & Visually Impaired*

A = 13"
B = 1.813"
C = .18"
D = .13"
F = 80°



** Refer to architect folder for actual texture and color*

A = 13"
B = 1.813"
C = .18"
D = .13"
E = 2"
F = 80°



** Refer to architect folder for actual texture and color*

Technical Data

PRODUCT	LENGTHS	VI STRIPS	PROFILE
1/8" Round Profile	3', 4', 5', 6'	Optional	Round
1/8" Square Profile	3', 4', 5', 6'	Optional	Square
1/8" Sculptured Profile	3', 4', 5', 6'	Optional	Sculptured
1/8" Risers (7" height w/toe)	3', 4', 5', 6'	n/a	None
1/8" Risers (6" Cove)	4'	n/a	None
1/8" Skirting (10" toeless base)	4'	n/a	None

Applicable Standards: Treads: ASTM F2169, Type TS, Class 2, Group 1 & 2


Risers & Skirting: ASTM F1861, Type TS, Group 1, Style A & B

Indentation Resistance: ASTM F970 - .000" residual indent at modified 600 PSI

Flame Resistance: ASTM E648, Class 1

Nose filler NOT REQUIRED. The superior construction of our ColorScape Type TS Rubber stair treads do not require nose filler at installation.



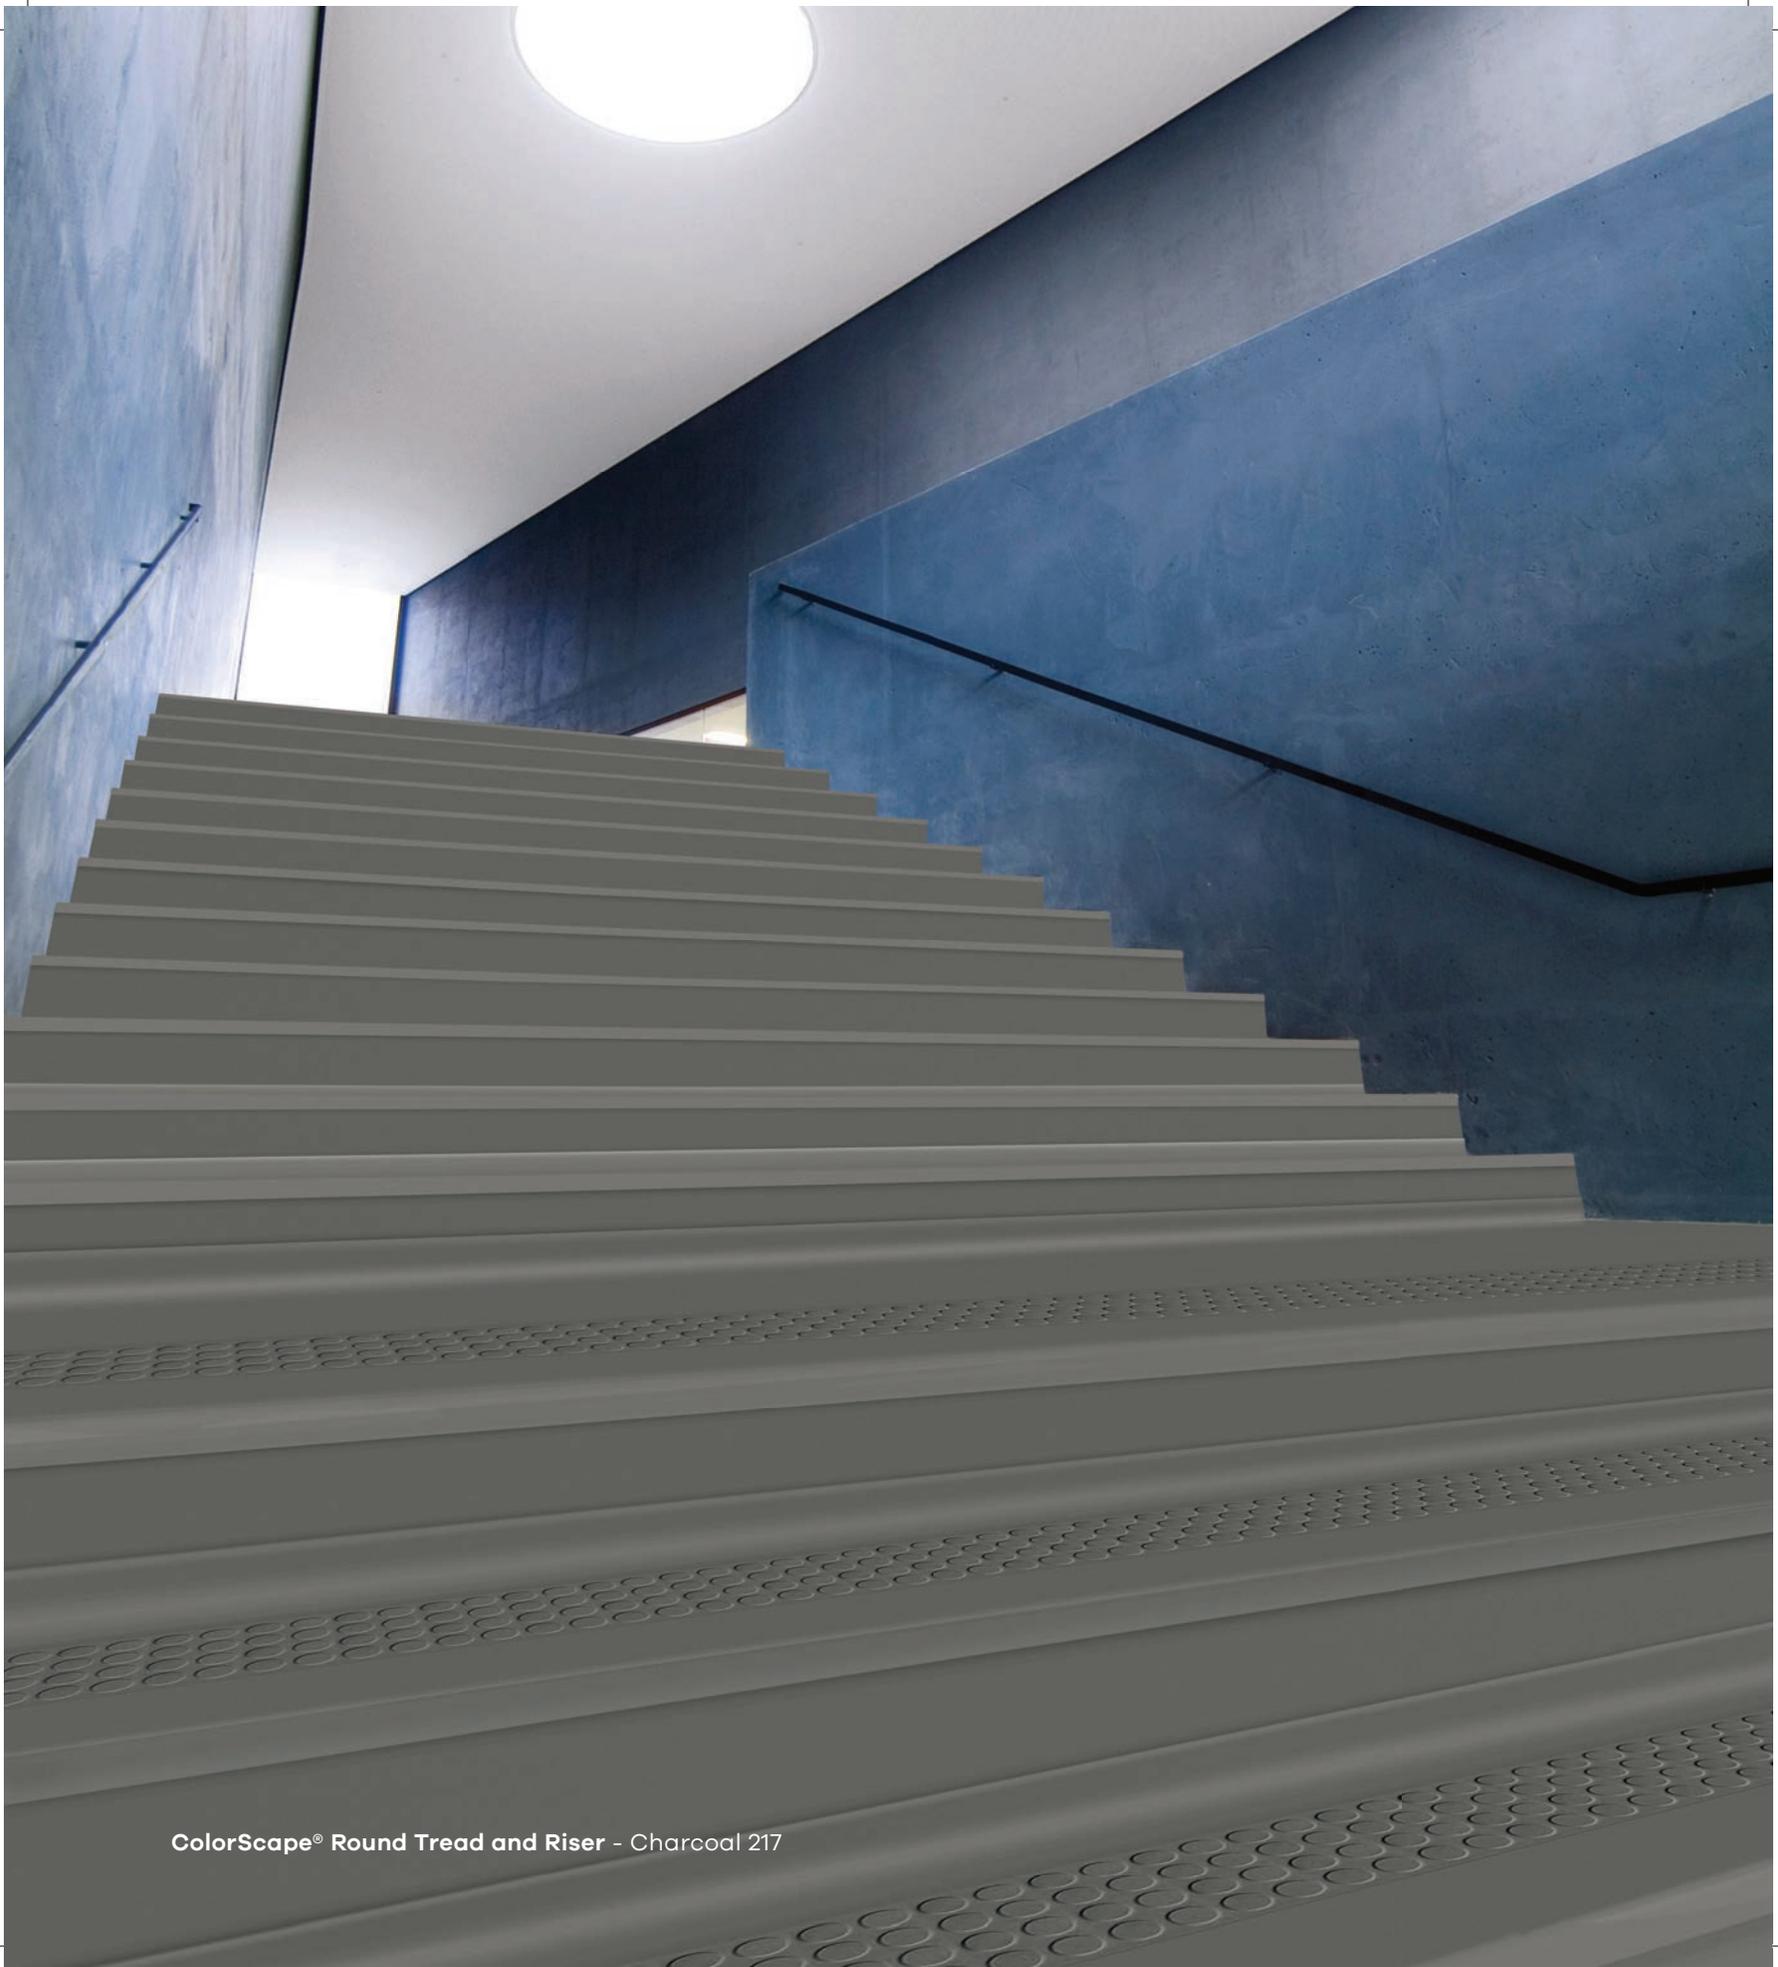


ColorScape® Round Tread and Riser - Charcoal 217

ConnectStep®

ConnectStep® Single Piece Stair Tread and Riser Combination: Square Nose and Visually Impaired

ConnectStep speeds installation, reduces maintenance and provides a uniform, seamless and contoured look. ConnectStep automatically adjusts for step depths of between 9.5 inches and 13 inches. This also allows

for adjustments to varying riser heights. Available in ColorSpec's Sculptured Profile and ColorScape's Round or Sculptured Profiles with optional VI strip inserts.

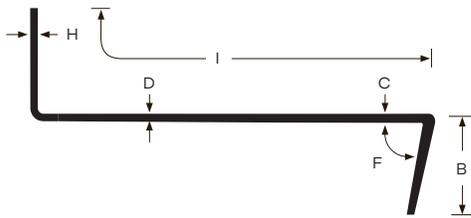

B = 1.88"
C = .188"
D = .188"
F = 80°
H = .080"
I = 20"



Superior Rubber Formulation

- Superior indentation resistance, color retention and slip-resistance
- Superior scratch-resistance due to low clay and high pigment content
- Quieter underfoot

Built-in, Long Lasting Migrating Wax

- No wax required, low maintenance option
- Self-waxing feature for superior appearance retention
- Lower life cycle costs

Superior Profile Design


- Profile design allows for enhanced cleanability
- Available with or without visually impaired strip




Linear Series

Flexible Nose For Easy Compliance

All Linear Series Stair Treads have a notch behind the nose for increased flexibility. The ADA requires nosing angles to be between 60° and 90° from the horizontal. This product modification will allow the nosing position of these products to more easily conform to the steps' nosings that have been built to the severest angle allowed by the ADA (60°).




ADA



Commercial 250 - Heavy Traffic | Vinyl & Rubber


A = 12"
B = 1.625"
B2 = 1.5"
C = .25"
D = .125"



Six-Grip Strip

Commercial 210 - Normal Traffic | Vinyl Only

A = 12"
B = 1.5"
C = .21"
D = .125"



Pyramidal Gripper
Square Nose Only

Commercial 150 - Light Traffic | Vinyl Only


A = 12"
B = 1.5"
C = .15"
D = .125"




Full Depth
Corrugation



Risers

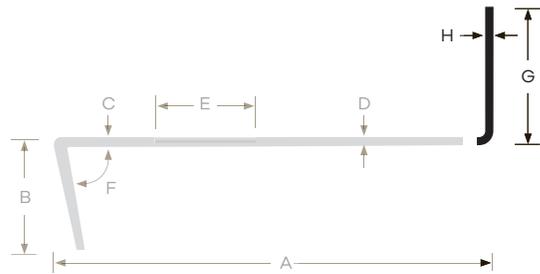

Risers are available in coordinating colors.

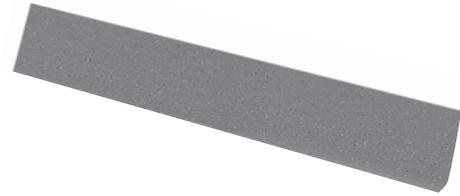

Technical Data


PRODUCT	LENGTHS	VI STRIPS	PROFILE
1/8" Risers (7" height w/toe)	3', 4', 5', 6'	n/a	Smooth
1/8" Risers (6" Cove)	4'	n/a	Smooth

Stair Nosings

510 Top-Set Nosing (Square Nose)

Covers leading edge of step. May be used over vinyl and sheet goods.


Packing: 20-12' secs., 240 lin. ft. per carton



575 Overlap Stair Nosing

Nosing with deep grooves and overlap lip. Accepts material to 1/8" with lip, to 3/16" without lip.


Packing: 10-12' secs., 120 lin. ft. per carton



565 Double Undercut Carpet Stair Nosing

For 1/4" and 5/16" carpet. Accommodates step and riser; with ribbed surface.


Packing: 10-12' secs., 120 lin. ft. per carton



580 Commercial Step Nosing

Square step nosing for 1/8" material. Ribbed surface.


Packing: 10-12' secs., 120 lin. ft. per carton



570 Superior Carpet Stair Nosing

Friction-Grip nosing for use when only step is covered. Undercut for 1/4" and 5/16" carpet.


Packing: 10-12' secs., 120 lin. ft. per carton



585 Top-Set Nosing for 1/4", 1/8" or .080" Material

Ribbed surface nosing can be cut along pre-grooved channels to adjoin 1/4", 1/8" or .080" resilient flooring materials.


Packing: 10-12' secs., 120 lin. ft. per carton



Visually Impaired Treads & Nosings


Visually Impaired Treads and Nosing are available with smooth vinyl insert strips in ALL 36 Accord colors. Also, we offer abrasive strips in the 8 abrasive colors shown below along with a photoluminescent smooth strip available in the one color shown below.

Visually Impaired Safety Treads meet California Disabled Access Regulation, Title 24, Section 3306 for the visually impaired when used with contrasting strip color. Tape may be ordered separately for onsite installations.




Design: 2" (50.800 mm) Abrasive Strip

A = 12"
 B = 1.625"
 C = .25"
 D = .125"
 E = 2"



Gray



Yellow



White



Orange



Brick



Black



Hazard



Photoluminescent

Rubber Performance

Durability Meets Design

Our superior recipe with proper curing allows our rubber products to look better and be easier to maintain long-term.

- > Carefully engineered profiles provide better acoustics and greater comfort underfoot
- > Never needs to be waxed, thanks to a proprietary combination of inherent waxes
- > Superior thermoset rubber retains color, resists indentation and crackling, and is quiet underfoot
- > Superior scratch-resistance due to low clay and high pigment content
- > No finish or stripping, lowers maintenance costs
- > Low emission: FloorScore Certified
- > Excellent wear resistance
- > Slip resistant
- > Quiet under wheeled traffic
- > Profile design allows for enhanced cleanability



American Made

At Mannington Commercial, we are very proud to craft all of our resilient sheet, rubber, carpet and more than 90% of our LVT right here in the USA. It means supporting local economies and employing generations of American families. And it means providing you with the industry's most innovative flooring solutions.

Learn more at
manningtoncommercial.com



Printed on FSC® certified paper

GLUE DOWN