





Access

Mannington
COMMERCIAL

Colorways



Urban Line Felt



Linen Weave



Equator Wave



Ceramic Light



Linear Stone Black



Ceramic Flint

Colorways



Ceramic Dark



Ceramic Ecu



Linear Stone Shale



Dry Stone Clay



Traditional Oak



Bleached Elm

Colorways



Black Walnut



Dusky Walnut




Frosted Oak



Winter Oak



Shadow Oak

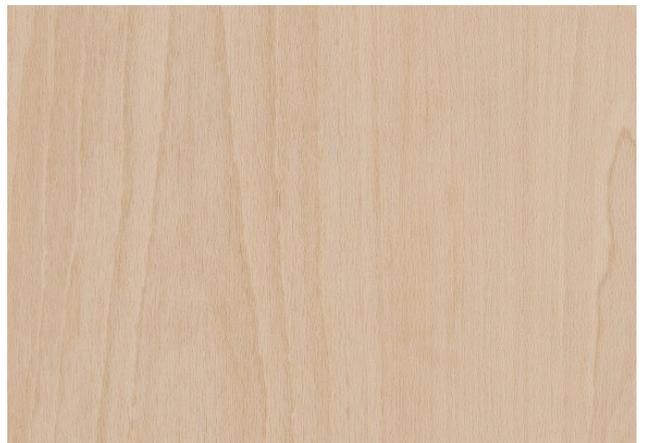

Simple Beech

Colorways



Shibori Jasmine



Ashdown Plum

Access

Style	ACCESS
Construction	Luxury Vinyl Tile Non-ortho phthalates
Classification	ASTM F1700 Class III, Type B
Total Thickness	0.197" / 5.0 mm
Wear Layer Thickness	20 mil
Wear Layer	Urethane
Sizes	17.7" x 17.7"
Colors	10
Packaging	5.9''' x 39.4''' - , 19.375 Square Feet (1.800), 1.868 Lbs/SF
Adhesive	Amtico Tackifier XpressStep for LVT & Sheet Vinyl Full Coverage Spray V-88 Full Spread MoistureLoc Full Spread (One Component) V-95 Full Spread (2-part Epoxy)
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.
Testing	
HUD/FHA	Passes
Flexibility (ASTM F137)	Passes- 1" Mandrel - No Crack/Break
Dimensional Stability (ASTM F2199)	Passes- Max 0.020 in/lin ft
Squareness (ASTM F2055)	Passes- Max 0.010"
Static Load (ASTM F970 mod.)	Passes- 2,000 PSI; Residual Indent ≤ 0.005"
Residual Indentation (ASTM F1914)	Passes- < 8% Avg / 10% Single Value
Flooring Radiant Panel (ASTM E648)	Passes- Class 1; ≥ 0.45 watts/cm ²
Smoke Density (ASTM E662)	Passes- ≤ 450
Slip Resistance (ASTMC1028)	Passes- ≥ 0.5 Leather; 0.6 Rubber
Resistance to Light (ASTM F1515)	Passes
Chemical Resistance (ASTM F925)	Passes
Resistance to Heat (ASTM F1514)	Passes
Environmental Data	
Rapidly Renewable Content	N/A
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017
Product Declarations	Third Party EPD
Carbon Offset	N/A
LEED Scoreboard	May contribute to LEED credits: Building Product Disclosures & Optimizations - EPDs, Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information
Manufacturing	South Korea
Warranty	
Warranty	10 years