



Frenemy Collection

Mannington
COMMERCIAL



Cover: Stock Brights - Joint Venture 83297, **Stock** - GDP 83289
Above: Stock - GDP 83289
Installation - Horizontal Brick Ashlar



Stock Brights - Joint Venture 83297
Installation - Horizontal Brick Ashlar



Block - GDP 83289
Installation - Horizontal Brick Ashlar



Block Brights - Joint Venture 83297
Installation - Horizontal Brick Ashlar



Stock - Capital Gains 11287
Installation - Horizontal Brick Ashlar



Stock Brights - IPO 11295
Installation - Horizontal Brick Ashlar



Stock - Bonds 12288
Installation - Horizontal Brick Ashlar



Stock Brights - FDIC 12296
Installation - Horizontal Brick Ashlar




Stock - Acquisition 84291
Installation - Horizontal Brick Ashlar



Stock Brights - Offerings 84299
Installation - Horizontal Brick Ashlar




Stock - S&P 14286
Installation - Horizontal Brick Ashlar

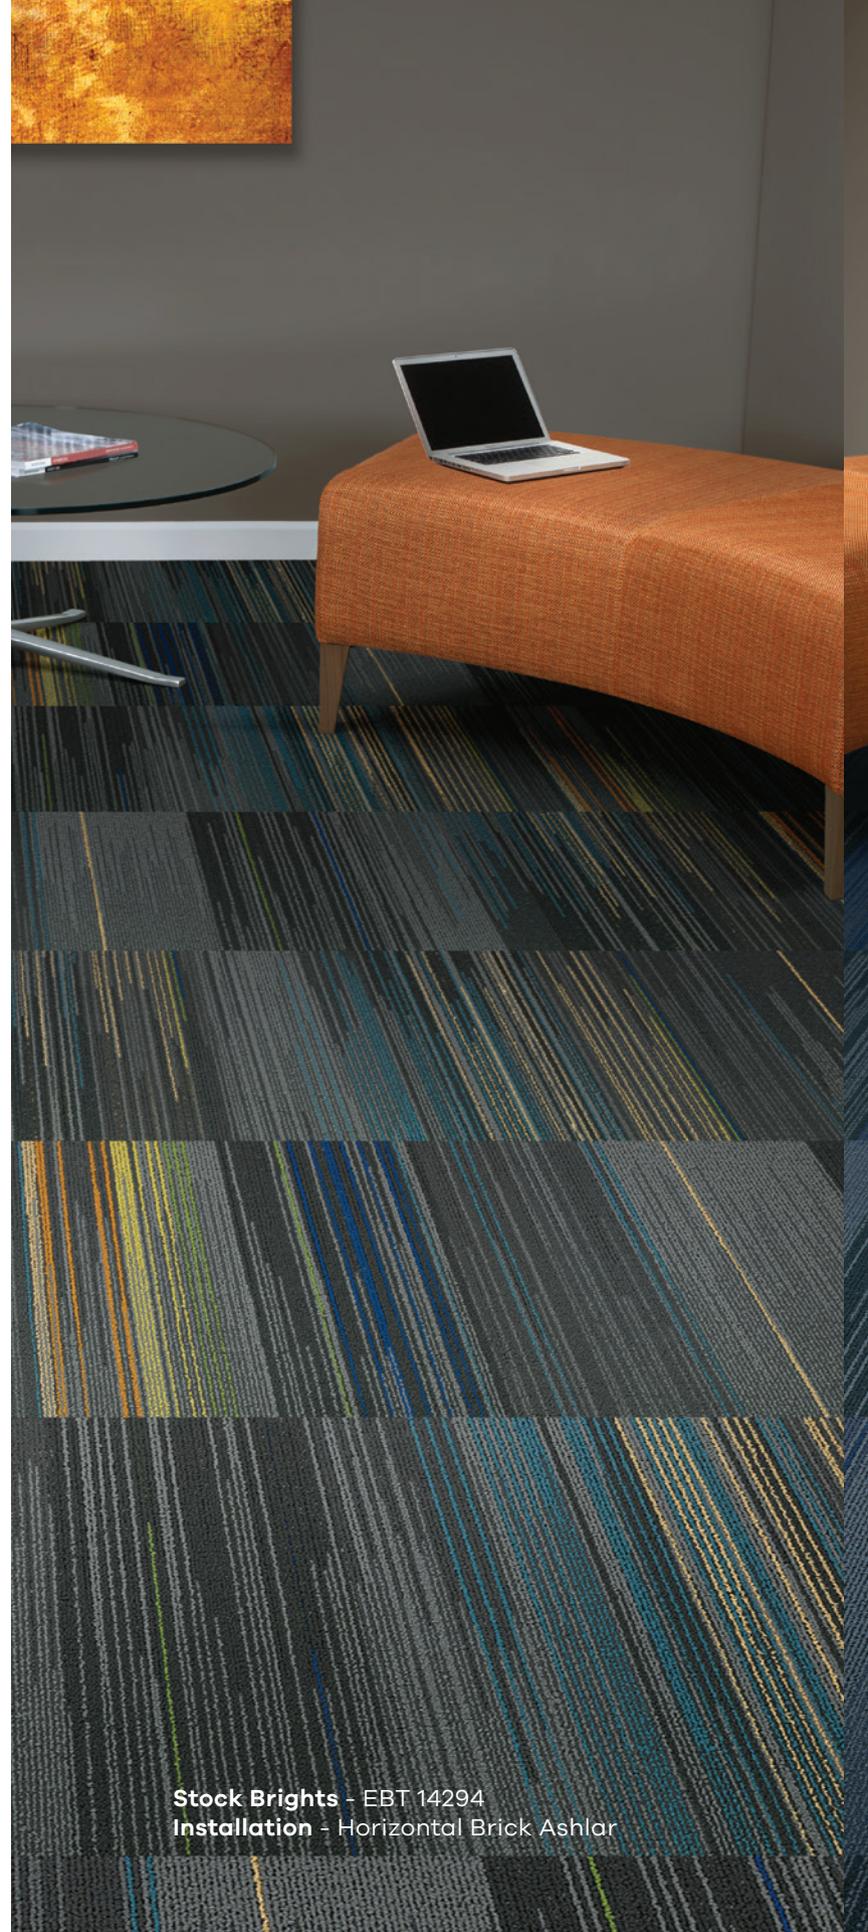

Stock Brights - EBT 14294
Installation - Horizontal Brick Ashlar



Stock - Nasdaq 34285
Installation - Horizontal Brick Ashlar

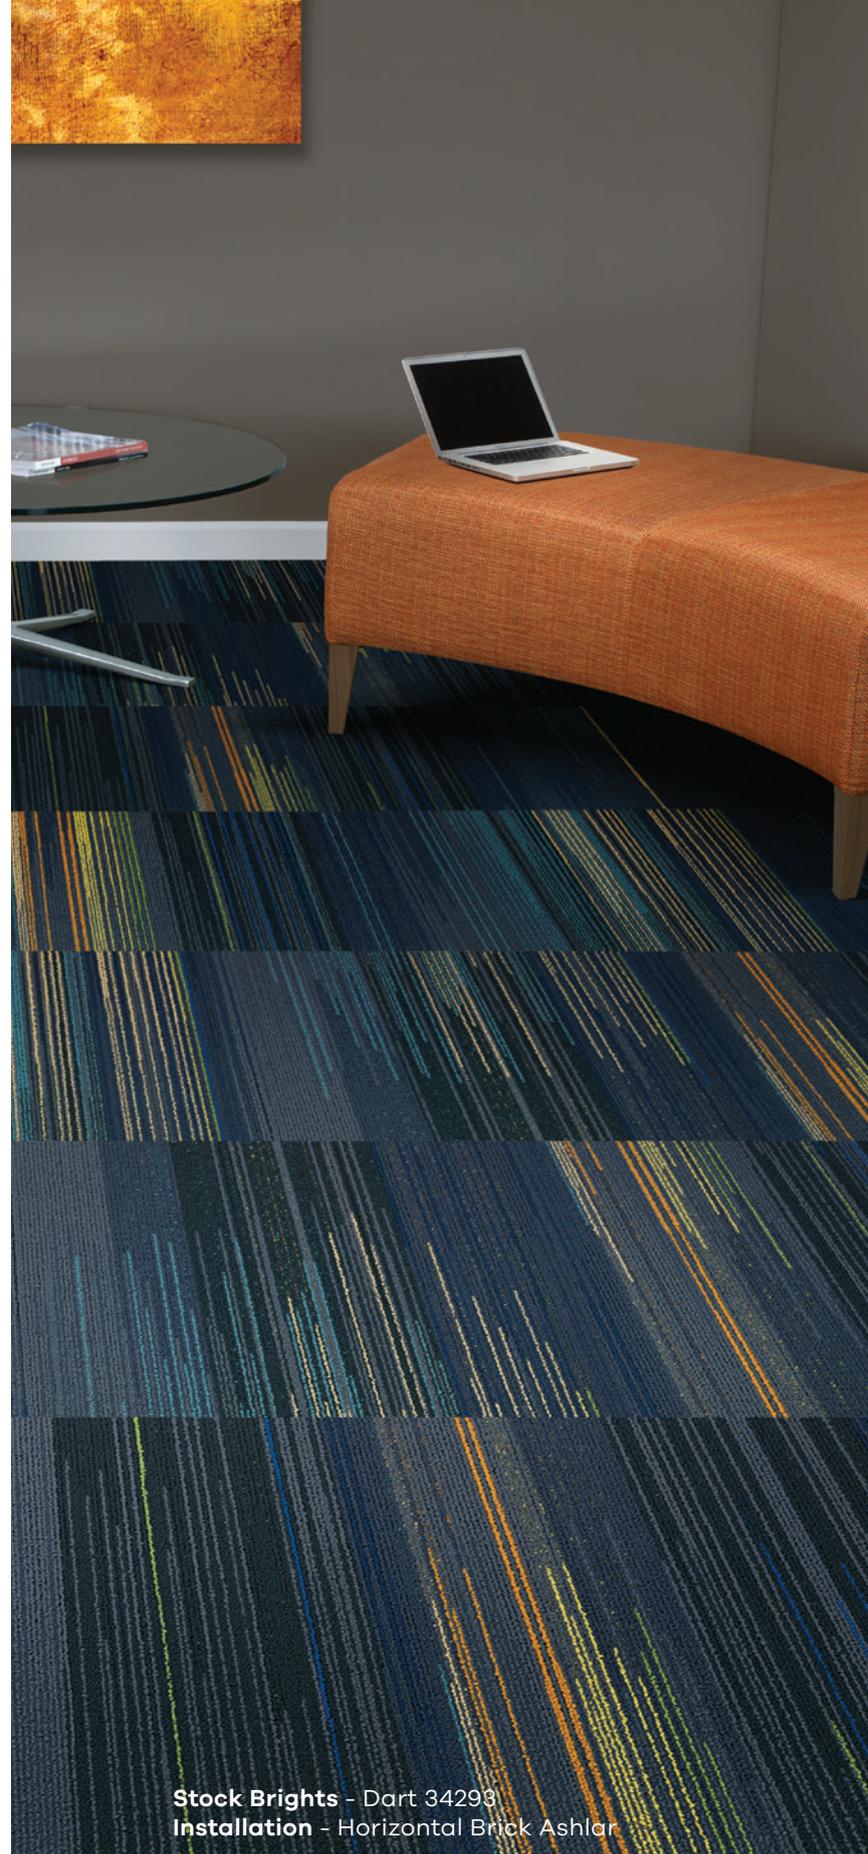

Stock Brights - Dart 34293
Installation - Horizontal Brick Ashlar



Stock - Market 64292
Installation - Horizontal Brick Ashlar



Stock Brights - Partnership 64300
Installation - Horizontal Brick Ashlar

Frenemy Collection

Style	Block, Stock (Modular)	Block Brights, Stock Brights (Modular)
Construction	Textured Patterned Loop	Textured Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution	Solution
Guage	1/10	1/10
Stitches Per Inch	9 (35.43 per 10 cm)	9 (35.43 per 10 cm)
Density	4,975 (184.86 kg/m ³)	4,975 (184.86 kg/m ³)
Pile Thickness	0.123" (3.12 mm)	0.123" (3.12 mm)
Weight	17 oz/yd ² (576 g/m ²)	17 oz/yd ² (576 g/m ²)
Backing Type	Infinity [®] 2 Modular	Infinity [®] 2 Modular
Size	24" x 24" (60.69 x 60.69 cm)	24" x 24" (60.69 x 60.69 cm)
Colors	8 Colors Per Style	8 Colors Per Style
Packaging	8 yd ² / 18 Tiles	8 yd ² / 18 Tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	Horizontal Brick Ashlar	Horizontal Brick Ashlar ONLY
Testing		
Dimensional Stability (Aachen Test)	Passes	
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Methenamine Pill Test (ASTM D2859)	Passes	
Hexapod (ASTM D5252) TARR	3.5 - severe	
Environmental Data		
NSF/ANSI 140 Certification	Infinity [®] 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered	
Warranty		
	Limited Lifetime Wear & Backing Warranty	
	Limited 15-Year XGUARD [®] Stain Resistant Warranty	
	Limited 15-Year ColorSafe [®] Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.