



Spacia® Collection - Abstract & Stone

Mannington
COMMERCIAL



Cover: Stone (18" x 18" & 12" x 18") - Gibson SS5S2603, Lichen SS5S2629
Above: Abstract (18" x 18") - Sabiro Stone SS5A4706





Stone (36" x 36") - Gibson SS5S2603, Julep SS5S2606, Wood (7.25" x 48") - Mulled Oak SS5W3313



Abstract (6" x 36") - Mirus Feather SS5A6120

Beautifully Made in North America

Crafted by the Industry Leader in LVT

At Mannington Commercial, we proudly manufacture the vast majority of our LVT right here in North America, including Spacia. By controlling the process from start to finish, from design to material sourcing to delivery, we are able to bring you hard surface flooring products that are optimized to fit your needs.

Better Quality, Better Service

- Product is holistically designed and engineered from the ground up
- More than a decade of domestically producing LVT
- A warranty you can count on
- Product Specific HPD and EPD
- Superior quality control in manufacturing

Big Picture Benefits

- High-quality manufacturing jobs that sustain American communities
- Drastically reduced carbon footprint of domestic vs. international transport
- Adherence to practices ensuring workers' safety and environmental preservation
- Dedication to leading the industry in responsible, high-quality manufacturing

Crafted with Purpose.





Abstract (12" x 18" Cross Grain) - Stellar Ash SS5A3629

Defeat Damp Spaces

Your job just got easier. With our comprehensive moisture solutions for LVT, you can defeat the most extreme high moisture conditions.

Best Solutions for:

Any Slab Condition

NO Moisture Testing Required – NO RH limit, NO Testing*

Adhesive

MoistureLoc

*** Conditions**

No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

Best Solutions for:

Slabs with Intact Vapor Barrier (Class B or better)

Quick pH Testing Required**

Adhesive

	pH
V-88	12
MoistureLoc	None
QuickStix® with Moisture Resistant Primer**	12

****Conditions**

Intact Class B or better vapor barrier | No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

Best Solutions for:

Unknown Slab Conditions

Moisture Testing Required

Adhesive	RH%	MVER	pH
V-88	95	10	12
MoistureLoc	None	None	None
XpressStep LVT	98	10	12
QuickStix® with Premium Universal Primer (with IVB)	99	18	12
QuickStix® with Premium Universal Primer (No IVB)	95	10	12
V-95	85	5	9



Success Is in Our Science



Introducing an advancement in our proven Quantum Guard technology: Quantum Guard Elite. This patent pending technology provides the ultimate solution for all aspects of LVT performance.

- Highest scratch resistance in the industry
- Engineered for best-in-class dimensional stability
- Superior impact resistance
- Cuts cleanly for highest quality installation
- Easy no-polish maintenance significantly reduces overall life cycle cost and total cost of ownership
- Advanced stain resistance

Outperforms in Scratch Resistance

Quantum Guard Elite


Leading Competitor

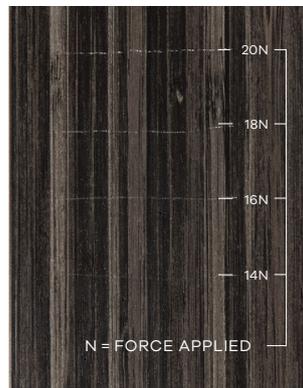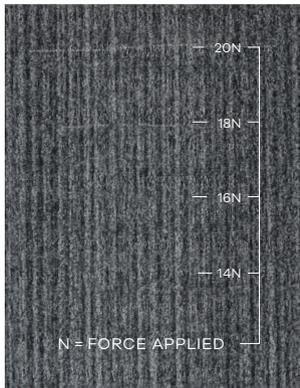

With a patent-pending two-part wear layer and aluminum oxide infused top coat, Quantum Guard Elite offers superior scratch resistance vs. the leading competitor.

Complete Multi-Layered Protection



Quantum Guard Elite combines a hard wear layer and a flexible wear layer for superior durability with the added protection of our proprietary aluminum oxide technology.

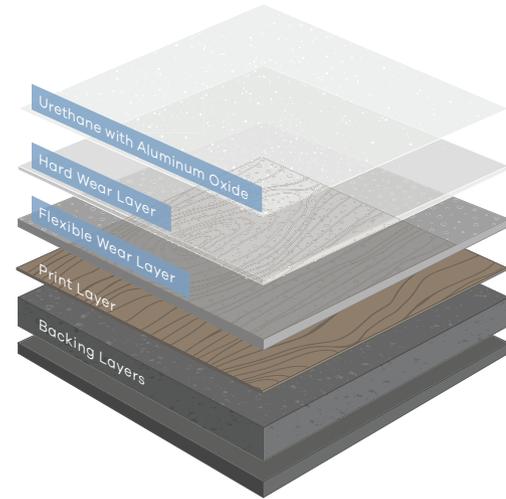

Best-in-Class Dimensional Stability

Quantum Guard Elite

Leading Competitor



LVT with Quantum Guard Elite is fully engineered to offer the perfect balance of hardness and flexibility, which helps prevent product failures in commercial environments. Products exposed to 80 °C for six hours.

Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

Fusion

Rubber Transition Strip

When carpet and resilient flooring adjoin, there are often differences in product heights. Eliminate the problem with Fusion Rubber Transition Strips. Place Fusion Strips wherever carpet meets resilient flooring to create a subtle transition with minimal visual interruption. The compact strips are quick and easy to apply during flooring installation. The result is a safer, more attractive floor.



Product Information

- Transition from 2.5 mm to 9.5 mm
- 10 Standard colors and Platinum Metallic 117
- Non-standard colors require a 5 carton minimum order
- 2.125" reduction width, 12' length
- 25 pieces of 12' sections per carton (300 lin ft)



Compact Mixed Flooring Reducer

Fusion Rubber Transition Strips provide a 6-7 mm reduction over 2.125 inches that are easy to install.

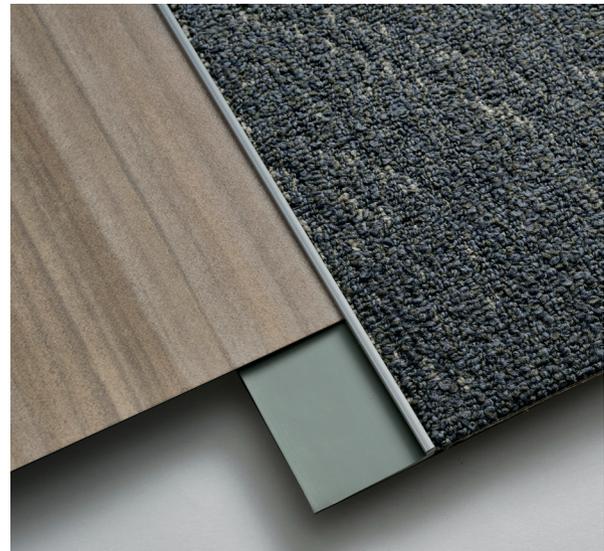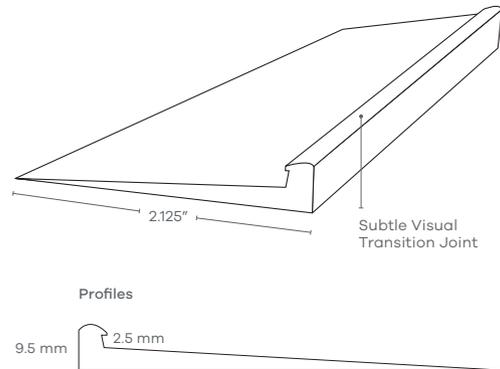

Environmental Attributes

- FloorScore Certified; CDPH v 1.1 - 2010
- May contribute to LEED credits
- mindfulMaterials



Abstract – Grey Burnished Metal AR0ARH13, Polished Copper AR0APL45 in Large Parquet Laying Pattern

Feature Stripping

Add contrast, create a grout effect or define tile and plank shapes with Amtico feature stripping. Available in a choice of five sizes.

Feature stripping is available in 2mm or 2.5mm. For stripping being used in beveled edge installations, 2.0mm stripping is recommended and for unbeveled edge installations, 2.5mm stripping is recommended.

All Amtico Signature colors are available in stripping and can be used with any 2.5mm LVT.

Size Options:



1/8" x 36" (3.2 mm x 914.4 mm)



1/4" x 36" (6.4 mm x 914.4 mm)



3/8" x 36" (9.5 mm x 914.4 mm)



1/2" x 36" (12.7 mm x 914.4 mm)



3/4" x 36" (19.1 mm x 914.4 mm)

Specialty stripping colors:



Pure Plain Black

AROAPN22



Pure Plain White

AROAPN11



Polished Copper

AROAPL45



Polished Gold

AROAPL78



Polished Silver

AROAPL32

* Sizes shown are not actual size

Spacia® Collection | Abstract & Stone Product Availability

Product Name	Product Code	Surface Finish - Ceramic	Surface Finish - Riven	Quantum Guard Elite®	Micro-beveled Edges	12" x 18" (305 x 457 mm)	12" x 18" (305 x 457 mm) Cross Grain	18" x 18" (457 x 457 mm)	36" x 36" (915 x 915 mm)	6" x 36" (152.4 x 915 mm)	6" x 36" (152.4 x 915 mm) Cross Grain
ABSTRACT											
Bronze	SS5A4805	•		•	•	•		•			
Constellation Ash	SS5A4701	•		•	•	•		•		•	
Constellation Cloud	SS5A4700	•		•	•	•		•		•	
Constellation Grey	SS5A4702	•		•	•	•		•		•	
Java Ash	SS5A4704	•		•	•	•		•		•	
Java Cloud	SS5A4703	•		•	•	•		•		•	
Java Grey	SS5A4705	•		•	•	•		•		•	
Linen Weave	SS5A3800	•		•	•	•		•			
Metropolis Smoke	SS5A2627	•		•	•	•		•			
Mirus Cotton	SS5A6110	•		•	•		•	•		•	
Mirus Feather	SS5A6120	•		•	•		•	•		•	
Mirus Hemp	SS5A6130	•		•	•		•	•		•	
Sabiro Smoke	SS5A4707	•		•	•	•		•		•	
Sabiro Stone	SS5A4706	•		•	•	•		•		•	
Satin Weave	SS5A3805	•		•	•			•			
Softline Pebble	SS5A3802	•		•	•		•	•			•
Steel	SS5A2804	•		•	•	•		•			
Stellar Ash	SS5A3629	•		•	•		•	•			•
Stellar Grey	SS5A3627	•		•	•		•	•			•
Zinc	SS5A3620	•		•	•	•		•			
STONE											
Bias Travertine Oyster	SS5S3595	•		•	•	•		•			
Black Marble	SS5S2621	•		•	•	•		•			
Bottocino Grey	SS5S3598	•		•	•	•		•			
Ceramic Dark	SS5S3566	•		•	•	•		•			
Ceramic Ecru	SS5S3592	•		•	•	•		•			
Ceramic Flint	SS5S2594	•		•	•	•		•			
Ceramic Light	SS5S1565	•		•	•	•		•			
Ceramic Sable	SS5S3593	•		•	•	•		•			
Dry Stone Alba	SS5S4401		•	•	•	•		•			
Dry Stone Cinder	SS5S4433		•	•	•	•		•			
Dry Stone Loam	SS5S4434		•	•	•	•		•			
Fairford Stone	SS5S1595	•		•	•	•		•			
Gallery Concrete	SS5S3071	•		•	•	•		•			
Gibson	SS5S2603	•		•	•	•		•	•		
Jet	SS5S3074	•		•	•	•		•			
Julep	SS5S2606	•		•	•	•		•	•		
Kingham Stone	SS5S1594	•		•	•	•		•			
Lichen	SS5S2629	•		•	•	•		•			
Linear Stone Shale	SS5S3606	•		•	•	•		•			
Mist	SS5S3073	•		•	•	•		•			
Monument Concrete	SS5S3072	•		•	•	•		•			
Noche Travertine	SS5S4590	•		•	•	•		•			
Ocean Travertine	SS5S3600	•		•	•	•		•			
Pale Grey Slate	SS5S3601		•	•	•	•		•			
Peak	SS5S2633	•		•	•	•		•			
Plaza Concrete	SS5S3070	•		•	•	•		•			
Sea	SS5S2631	•		•	•	•		•			
White Marble	SS5S2618	•		•	•	•		•			

Spacia® Collection | 4.0mm Abstract & Stone Product Availability

Product Name	Product Code	Surface Finish - Ceramic	Surface Finish - Riven	Quantum Guard Elite®	Micro-beveled Edges	12" x 24" (305 x 609.6 mm)	12" x 24" (305 x 609.6mm) Cross Grain	7.25" x 48" (184 x 1219 mm)	7.25" x 48" (184 x 1219mm) Cross Grain
ABSTRACT									
Bronze	S45A4805	•		•	•	•			
Constellation Ash	S45A4701	•		•	•	•		•	
Constellation Cloud	S45A4700	•		•	•	•		•	
Constellation Grey	S45A4702	•		•	•	•		•	
Java Ash	S45A4704	•		•	•	•		•	
Java Cloud	S45A4703	•		•	•	•		•	
Java Grey	S45A4705	•		•	•	•		•	
Linen Weave	S45A3800	•		•	•	•			
Metropolis Smoke	S45A2627	•		•	•	•			
Mirus Cotton	S45A6110	•		•	•	•		•	
Mirus Feather	S45A6120	•		•	•	•		•	
Mirus Hemp	S45A6130	•		•	•	•		•	
Sabiro Smoke	S45A4707	•		•	•	•		•	
Sabiro Stone	S45A4706	•		•	•	•		•	
Satin Weave	S45A3805	•		•	•	•			
Softline Pebble	S45A3802	•		•	•		•		•
Steel	S45A2804	•		•	•	•			
Stellar Ash	S45A3629	•		•	•		•		•
Stellar Grey	S45A3627	•		•	•		•		•
Zinc	S45A3620	•		•	•	•			
STONE									
Bias Travertine Oyster	S45S3595	•		•	•	•			
Black Marble	S45S2621	•		•	•	•			
Botticino Grey	S45S3598	•		•	•	•			
Ceramic Dark	S45S3566	•		•	•	•			
Ceramic Ecu	S45S3592	•		•	•	•			
Ceramic Flint	S45S2594	•		•	•	•			
Ceramic Light	S45S1565	•		•	•	•			
Ceramic Sable	S45S3593	•		•	•	•			
Dry Stone Alba	S45S4401		•	•	•	•			
Dry Stone Cinder	S45S4433		•	•	•	•			
Dry Stone Loam	S45S4434		•	•	•	•			
Fairford Stone	S45S1595	•		•	•	•			
Gallery Concrete	S45S3071	•		•	•	•			
Gibson	S45S2603	•		•	•	•			
Jet	S45S3074	•		•	•	•			
Julep	S45S2606	•		•	•	•			
Kingham Stone	S45S1594	•		•	•	•			
Lichen	S45S2629	•		•	•	•			
Linear Stone Shale	S45S3606	•		•	•	•			
Mist	S45S3073	•		•	•	•			
Monument Concrete	S45S3072	•		•	•	•			
Noche Travertine	S45S4590	•		•	•	•			
Ocean Travertine	S45S3600	•		•	•	•			
Pale Grey Slate	S45S3601		•	•	•	•			
Peak	S45S2633	•		•	•	•			
Plaza Concrete	S45S3070	•		•	•	•			
Sea	S45S2631	•		•	•	•			
White Marble	S45S2618	•		•	•	•			

Spacia® Collection | Abstract

Style	Abstract	4mm Abstract
Construction	Luxury Vinyl Tile	Luxury Vinyl Tile
Classification	Non-ortho Phthalate	Non-ortho Phthalate
Total Thickness	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
Wear Layer Thickness	0.098" (2.5 mm)	0.1575" (4.0 mm)
Wear Layer	20 mil (0.51 mm)	20 mil (0.51 mm)
Edge Treatment	Quantum Guard Elite®	Quantum Guard Elite®
Sizes	Micro-bevel	Micro-bevel
	12" x 18" (305 x 457 mm),	12" x 24" (305 x 609.6mm),
	18" x 18" (457 x 457 mm),	7.25" x 48" (184 x 1219mm)
	6" x 36" (152.5 x 915 mm)	
	Sizes are style dependent; refer to Product Availability Chart	Sizes are style dependent; refer to Product Availability Chart
Colors	20	20
Packaging	12" x 18" - 18 pcs, 27 ft ² (2.51 m ²), 20.12 lbs (9.13 kg)	12" x 24" - 11 pcs, 22 ft ² (2.044 m ²), 29.04 lbs (13.17 kg)
	18" x 18" - 12 pcs, 27 ft ² (2.51 m ²), 20.12 lbs (9.13 kg)	7.25" x 48" - 12 pcs, 29 ft ² (2.694 m ²), 38.28 lbs (17.36 kg)
	6" x 36" - 30 pcs, 45 ft ² (4.18 m ²), 33.53 lbs (15.21 kg)	
	Packaging may differ for QuickStix®	QuickStix® Not Available
Adhesive	Porous & Non-porous Substrates: V-88 Full Spread MoistureLoc Full Spread, One Component V-95 Full Spread, 2-Part Epoxy XpressStep for LVT & Sheet Vinyl Full Coverage Spray	
	Note: Must use V-95, MoistureLoc, QuickStix or XpressStep adhesive under hospital beds and heavy rolling load areas. In more abusive conditions such as areas subject to dragging force, direct sunlight or where topical moisture would be a concern, only V-95, MoistureLoc or QuickStix should be used.	
QuickStix®	Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.	
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.	
Testing		
HUD/FHA	Passes	
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break	
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/lin ft	
Squareness (ASTM F540)	Passes - Max 0.010"	
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"	
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber	
Resistance to Light (ASTM F1515)	Passes	
Chemical Resistance (ASTM F925)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Environmental Data		
Rapidly Renewable Content	Contains 2% rapidly renewable resource content	
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% (Cradle to Gate (A1 - A3); visit website for more information)	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl Verified Silver	
Warranty		
	Limited 15-Year Commercial Warranty	
	Limited 15-Year Quantum Guard Elite® Wear Warranty	

Spacia® Collection | Stone

Style	Stone	4mm Stone
Construction	Luxury Vinyl Tile Non-ortho Phthalate	Luxury Vinyl Tile Non-ortho Phthalate
Classification	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
Total Thickness	0.098" (2.5 mm)	0.1575" (4.0 mm)
Wear Layer Thickness	20 mil (0.51 mm)	20 mil (0.51 mm)
Wear Layer	Quantum Guard Elite®	Quantum Guard Elite®
Edge Treatment	Micro-bevel	Micro-bevel
Sizes	12" x 18" (305 x 457 mm), 18" x 18" (457 x 457 mm), 36" x 36" (229 x 915 mm) Sizes are style dependent; refer to Product Availability Chart	12" x 24" (305 x 609.6mm) Sizes are style dependent; refer to Product Availability Chart
Colors	28	28
Packaging	12" x 18" - 18 pcs, 27 ft ² (2.51 m ²), 20.12 lbs (9.13 kg) 18" x 18" - 12 pcs, 27 ft ² (2.51 m ²), 20.12 lbs (9.13 kg) 36" x 36" - 5 pcs, 45 ft ² (4.18 m ²), 33.53 lbs (15.21 kg) Packaging may differ for QuickStix®	12" x 24" - 11 pcs, 22 ft ² (2.044 m ²), 29.04 lbs (13.17 kg) QuickStix® Not Available
Adhesive	Porous & Non-porous Substrates: V-88 Full Spread MoistureLoc Full Spread, One Component V-95 Full Spread, 2-Part Epoxy XpressStep for LVT & Sheet Vinyl Full Coverage Spray Note: Must use V-95, MoistureLoc, Amtico RP-18, QuickStix or XpressStep adhesive under hospital beds and heavy rolling load areas. In more abusive conditions such as areas subject to dragging force, direct sunlight or where topical moisture would be a concern, only V-95, MoistureLoc, Amtico RP-18 or QuickStix should be used.	
QuickStix®	Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.	
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.	
Testing		
HUD/FHA	Passes	
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break	
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/lin ft	
Squareness (ASTM F540)	Passes - Max 0.010"	
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"	
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber	
Resistance to Light (ASTM F1515)	Passes	
Chemical Resistance (ASTM F925)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
Environmental Data		
Rapidly Renewable Content	Contains 2% rapidly renewable resource content	
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% (Cradle to Gate (A1 - A3); visit website for more information)	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl Verified Silver	
Warranty	Limited 15-Year Commercial Warranty Limited 15-Year Quantum Guard Elite® Wear Warranty	