



The Drift Collection

Mannington
COMMERCIAL



Cover: Stone - Terra Diamond D215

Above: Stone - Motus Patina D202, Abstract - Pax Lucent D211



Wood - Monterey Cypress Natural D106, Stone - Motus Lurex D201



Wood - Dutch Elm Nubuck D105, Dutch Elm Tinsmith D104




Abstract - Pax Platinum D212, Pax Ore D214




Wood - European Ash Fawn D102

The Drift Coordinates

Our flooring integrates seamlessly across product types and collections, so you can build an inspired flooring palette for your spaces without sacrificing form for function. The Drift Collection's versatile visuals work with styles from classic to contemporary, and palettes from warm to cool. Bring in organic patterns from our other flooring collections to add textural depth and richness.



- | | |
|---|--|
| 1. The Drift, Stone, Motus Lurex | 5. Spin, Channel, Smooth Jazz |
| 2. Discovery, Reveal, Luck | 6. Color Anchor LVT, Stride,
Cottontail |
| 3. The Drift, Wood, Bristol Rosewood
Classic | |
| 4. The Drift, Wood, European Ash
Natural | |



1. Teles, Stalagmite
2. Paradigm II, Intersect, Vanguard
3. The Drift, Stone, Fortis Silvered
4. The Drift, Abstract, Pax Platinum
5. Dark Skies, Haze, Canyon
6. The Drift, Wood, Dutch Elm Nubuck



QUANTUM GUARD®
elite

Success Is in Our Science



Introducing an advancement in our proven Quantum Guard technology: Quantum Guard Elite. This patent pending technology provides the ultimate solution for all aspects of LVT performance.

- Highest scratch resistance in the industry
- Engineered for best-in-class dimensional stability
- Superior impact resistance
- Cuts cleanly for highest quality installation
- Easy no-polish maintenance significantly reduces overall life cycle cost and total cost of ownership
- Advanced stain resistance

Outperforms in Scratch Resistance

Quantum Guard Elite


Leading Competitor

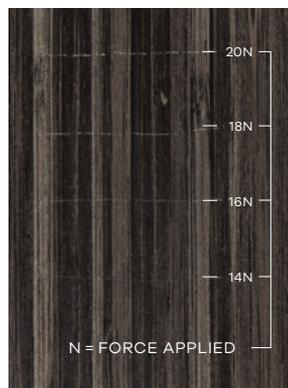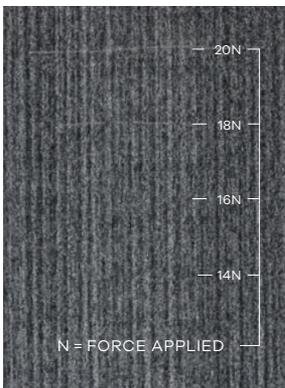

With a patent-pending two-part wear layer and aluminum oxide infused top coat, Quantum Guard Elite offers superior scratch resistance vs. the leading competitor.

Complete Multi-Layered Protection



Quantum Guard Elite combines a hard wear layer and a flexible wear layer for superior durability with the added protection of our proprietary aluminum oxide technology.

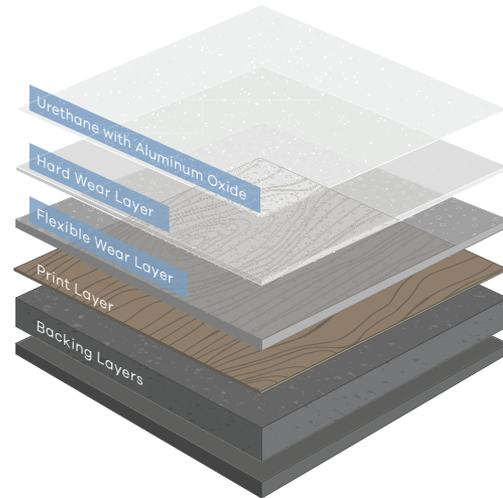

Best-in-Class Dimensional Stability

Quantum Guard Elite

Leading Competitor



LVT with Quantum Guard Elite is fully engineered to offer the perfect balance of hardness and flexibility, which helps prevent product failures in commercial environments. Products exposed to 80 ° C for six hours.

Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

The Drift Collection Product Availability

Product Name	Product Code	Surface Finish - Ceramic	Surface Finish - Stone	Surface Finish - Wood Trick	Quantum Guard Elite®	Micro-beveled Edges	Unbeveled Edges	6" x 48" (152 x 1219 mm)	7.25" x 48" (184 x 1219 mm)	12" x 24" (305 x 610 mm)	18" x 36" (457 x 915 mm)
ABSTRACT											
Pax Burnished	D213			•	•	•	•	•		•	
Pax Crystal	D209			•	•	•	•	•		•	
Pax Lucent	D211			•	•	•	•	•		•	
Pax Ore	D214			•	•	•	•	•		•	
Pax Platinum	D212			•	•	•	•	•		•	
Pax Sterling	D210			•	•	•	•	•		•	

STONE											
Fortis Alabaster	D205		•		•	•	•			•	
Fortis Gunmetal	D208		•		•	•	•			•	
Fortis Pewter	D206		•		•	•	•			•	
Fortis Silvered	D207		•		•	•	•			•	
Motus Alloy	D203	•			•	•	•			•	
Motus Enamel	D204	•			•	•	•			•	
Motus Lurex	D201	•			•	•	•			•	
Motus Patina	D202	•			•	•	•			•	
Terra Diamond	D215		•		•	•	•				•
Terra Graphite	D216		•		•	•	•				•

WOOD											
Bristol Rosewood Antiqued	D109			•	•	•	•		•		
Bristol Rosewood Classic	D108			•	•	•	•		•		
Bristol Rosewood Vintage	D110			•	•	•	•		•		
Dutch Elm Cashmere	D103			•	•	•	•		•		
Dutch Elm Nubuck	D105			•	•	•	•		•		
Dutch Elm Tinsmith	D104			•	•	•	•		•		
European Ash Fawn	D102			•	•	•	•	•			
European Ash Natural	D101			•	•	•	•	•			
Monterey Cypress Mink	D107			•	•	•	•	•			
Monterey Cypress Natural	D106			•	•	•	•	•			

The Drift Collection

Style	Abstract	Stone	Wood
Construction	Luxury Vinyl Tile Non-ortho Phthalate	Luxury Vinyl Tile Non-ortho Phthalate	Luxury Vinyl Tile Non-ortho Phthalate
Classification	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
Total Thickness	0.098" (2.5 mm)	0.098" (2.5 mm)	0.098" (2.5 mm)
Wear Layer Thickness	30 mil (0.76 mm)	30 mil (0.76 mm)	30 mil (0.76 mm)
Wear Layer	Quantum Guard Elite®	Quantum Guard Elite®	Quantum Guard Elite®
Edge Treatment	Micro-bevel or Unbeveled	Micro-bevel or Unbeveled	Micro-bevel or Unbeveled
Sizes	12" x 24" (305 x 610 mm) 6" x 48" (152 x 1219 mm)	12" x 24" (305 x 610 mm) 18" x 36" (457 x 915 mm) Sizes are style dependent; refer to Product Availability Chart	6" x 48" (152 x 1219 mm) 7.25" x 48" (184 x 1219 mm) Sizes are style dependent; refer to Product Availability Chart
Colors	6	10	10
Packaging	12" x 24" - 18 pcs, 36 ft ² (3.345 m ²), 26.1 lbs (11.84 kg) 6" x 48" - 24 pcs, 48 ft ² (4.459 m ²), 34.8 lbs (15.79 kg) Packaging may differ for QuickStix®	12" x 24" - 18 pcs, 36 ft ² (3.345 m ²), 26.1 lbs (11.84 kg) 18" x 36" - 9 pcs, 40.5 ft ² (3.763 m ²), 29.36 lbs (13.32 kg)	6" x 48" - 24 pcs, 48 ft ² (4.459 m ²), 34.8 lbs (15.79 kg) 7.25" x 48" - 18 pcs, 43.5 ft ² (4.041 m ²), 29.06 lbs (13.18 kg)
Adhesive	Porous & Non-porous Substrates: V-88 Full Spread MoistureLoc Full Spread, One Component V-95 Full Spread, 2-part Epoxy XpressStep for LVT & Sheet Vinyl Full Coverage Spray Note: Must use V-95, MoistureLoc or XpressStep adhesive under hospital beds and heavy rolling load areas. In more abusive conditions such as areas subject to dragging force, direct sunlight or where topical moisture would be a concern, only V-95 or MoistureLoc should be used.		
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.		
Testing			
HUD/FHA	Passes		
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break		
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/in		
Squareness (ASTM F2055)	Passes - Max 0.010"		
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"		
Residual Indentation (ASTM F1914)	Passes - < 8% Avg; 10% Single Value		
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²		
Smoke Density (ASTM E662)	Passes - ≤ 450		
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber		
Resistance to Light (ASTM F1515)	Passes		
Chemical Resistance (ASTM F925)	Passes		
Resistance to Heat (ASTM F1514)	Passes		
Environmental Data			
Rapidly Renewable Content	Contains 2% rapidly renewable resource content		
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017		
Product Declarations	Third Party Verified EPD, HPD		
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information		
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EDPs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 -Low Emitting Materials		
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information		
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl Verified Silver		
Warranty			
Limited 20 Year Commercial Warranty Limited 20 Year Quantum Guard Elite® Wear Warranty			