



Color Anchor LVT Collection

Mannington
COMMERCIAL



Cover: Stride (6" x 36" & 12" x 24") - Kettle Steam C164, Jade C173, Green Tea C174
Above: Stride (6" x 36") - Misty Mountain C161, Stonehenge C162, Lava Rock C163



Stride (18" x 18") - Squash Blossom C132, Stone Wash C172, Island Blue C129, Buzzy Yellow C124;
Groove (18" x 18") - Kettle Steam C144



Stride (18" x 18") - Big Wave C170, Lagoon C171, Flannel C146, Truffle C147



Stride (12" x 24") - London Fog C139, Milk Thistle C121, Island Blue C129, **Color Anchor** (Modular) - Ditto 12525, Thistle 24645, Island 35651
Carpet Installation -Herringbone


A long, bright hospital hallway with a patterned carpet. The carpet features a mix of green, tan, and grey tiles in a staggered, geometric pattern. On the left, there are large windows and glass doors leading outside. On the right, there is a reception desk with a white countertop and a dark wood base. Behind the desk is a glass partition with the Memorial logo and text. Two chairs are visible behind the desk.

 Memorial
Information
Guest Services

Groove (6" x 36") - Peanut Shell C113, Cottontail C118, Grassy Meadow C105, Granny Smith C155

Vivid Versatility

Color Anchor LVT brings spaces to life with vivid, versatile shades. The collection can be used on its own or integrated effortlessly with other flooring types. The variety of hues are available in two subtle patterns: Groove, a fabric-like crosshatch visual, and Stride, a finely dappled linear pattern. Color Anchor LVT is designed to coordinate across Mannington's carpet and hard surface offerings. With multiple plank and tile sizes to mix and match, there are endless patterning possibilities at your fingertips.

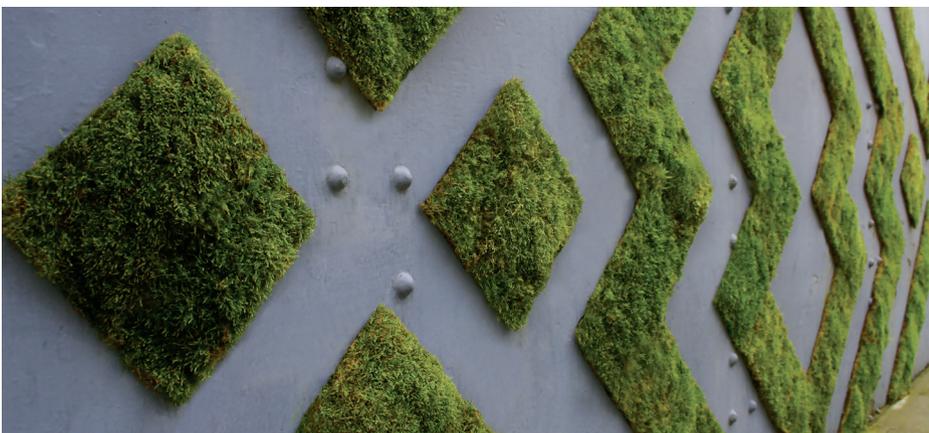

Design Solutions



Design Solutions


Whether you're looking for design support from the start of a project or in the final phase, Mannington's Design Solutions team can help. Our team of designers is here to support you, our customers, through every step of the design process, from concept to installation.

Your Vision Realized

Our team of designers with diverse backgrounds in interior design, graphic design and textile design will work with you to provide solutions, knowledge and options to simplify the design process and bring your vision to life.

Deliverables

- > Product Palettes
- > 2D and 3D Renderings
- > Composites
- > Configurations
- > Finished Plans
- > Rendered Floor Plan
- > Estimates
- > Installation Diagrams
- > Revit Files
- > Construction Documents

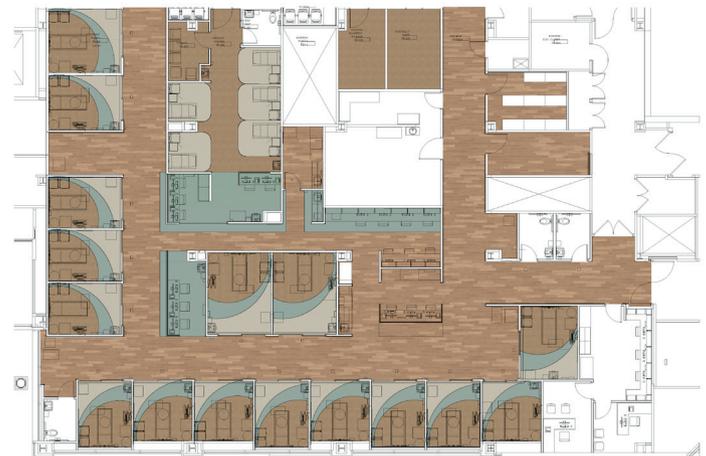



Beautifully Made in North America

Crafted by the Industry Leader in LVT

At Mannington Commercial, we proudly manufacture the vast majority of our LVT right here in North America, including Color Anchor. By controlling the process from start to finish, from design to material sourcing to delivery, we are able to bring you hard surface flooring products that are optimized to fit your needs.

Better Quality, Better Service

- Product is holistically designed and engineered from the ground up
- More than a decade of domestically producing LVT
- A warranty you can count on
- Product Specific HPD and EPD
- Superior quality control in manufacturing

Big Picture Benefits

- High-quality manufacturing jobs that sustain American communities
- Drastically reduced carbon footprint of domestic vs. international transport
- Adherence to practices ensuring workers' safety and environmental preservation
- Dedication to leading the industry in responsible, high-quality manufacturing
- Carbon Offset 105% (Cradle to Gate)

Crafted with Purpose.



BurkeBase® Premium TS Molded Wall Base - 190 Jackalope; Color Anchor, Stride - Flannel C146

Available Profile Heights	BurkeBase® Premium TS Molded 1/8"	BurkeBase® Type TP 1/8"	BurkeBase® Type TV 1/8"	BurkeBase® Type TV .080"
	4" (102 mm) 6" (152 mm)	2.5" (64 mm) 4" (102 mm) 4.5" (114 mm) 6" (152 mm)	2.5" (64 mm) 4" (102 mm) 4.5" (114 mm) 6" (152 mm)	2.5" (64 mm) 4" (102 mm) 6" (152 mm)
	Coved	Coved or Toeless	Coved or Toeless	Coved or Toeless

Warranty This product is backed by our Limited 5-Year Commercial Warranty.

Corners BurkeBase® Premium Type TS factory molded corners are available with 4" and 6" coved corners. Must be ordered at time of wall base order to ensure color match.

BurkeBase® Type TP/TV pre-formed corners are available in all profile heights. Must be ordered at time of wall base order to ensure color match.

Custom Colors Minimums apply.

Please make final selection for all colors from actual product samples.
For samples and information, visit manningtoncommercial.com or call 800.241.2262.

Defeat Damp Spaces

Your job just got easier. With our comprehensive moisture solutions for LVT, you can defeat the most extreme high moisture conditions.

Best Solutions for:

Any Slab Condition

NO Moisture Testing Required – NO RH limit, NO Testing*

Adhesive

Amtico RP-18

*** Conditions**

No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

Best Solutions for:

Slabs with Intact Vapor Barrier (Class B or better)

Quick pH Testing Required**

Adhesive

pH

Amtico Pressure Sensitive

12

Amtico RP-18

None

QuickStix® with Moisture Resistant Primer**

12

**** Conditions**

Intact Class B or better vapor barrier | No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

Best Solutions for:

Unknown Slab Conditions

Moisture Testing Required

Adhesive

RH%

MVER

pH

Amtico Pressure Sensitive

95

10

12

Amtico 373

90

10

8

Amtico RP-18

None

None

None

XpressStep LVT & Sheet

95

8

11

QuickStix® with Premium Universal Primer (with IVB)

99

18

12

QuickStix® with Premium Universal Primer (No IVB)

95

10

12

Color Anchor LVT | Groove Product Availability

Product Name	Product Code	Surface Finish - Ceramic	Quantum Guard Elite®	6" x 36" (152 x 915 mm)	12" x 24" (305 x 610 mm)	18" x 18" (457 x 457 mm)
GROOVE						
Big Wave	C150	•	•	•	•	•
Buzzy Yellow	C104	•	•	•	•	•
City Mouse	C145	•	•	•	•	•
Cottontail	C118	•	•	•	•	•
Flannel	C146	•	•	•	•	•
Granny Smith	C155	•	•	•	•	•
Grassy Meadow	C105	•	•	•	•	•
Green Tea	C154	•	•	•	•	•
Island Blue	C109	•	•	•	•	•
Jade	C153	•	•	•	•	•
Kettle Steam	C144	•	•	•	•	•
Lagoon	C151	•	•	•	•	•
Lava Rock	C143	•	•	•	•	•
London Fog	C119	•	•	•	•	•
Malt	C149	•	•	•	•	•
Midnight Twinkle	C108	•	•	•	•	•
Milk Thistle	C101	•	•	•	•	•
Misty Mountain	C141	•	•	•	•	•
Monstera	C156	•	•	•	•	•
Peanut Shell	C113	•	•	•	•	•
Poppy Red	C103	•	•	•	•	•
Rhubarb Pie	C102	•	•	•	•	•
Squash Blossom	C112	•	•	•	•	•
Squawk Box	C107	•	•	•	•	•
Stone Wash	C152	•	•	•	•	•
Stonehenge	C142	•	•	•	•	•
Truffle	C147	•	•	•	•	•
Velvet	C148	•	•	•	•	•
Winter Fleece	C117	•	•	•	•	•

Color Anchor LVT | Stride Product Availability

Product Name	Product Code	Surface Finish - Tick	Quantum Guard Elite®	6" x 36" (152 x 915 mm)	12" x 24" (305 x 610 mm)	18" x 18" (457 x 457 mm)
STRIDE						
Big Wave	C170	•	•	•	•	•
Buzzy Yellow	C124	•	•	•	•	•
City Mouse	C165	•	•	•	•	•
Cottontail	C138	•	•	•	•	•
Flannel	C166	•	•	•	•	•
Granny Smith	C175	•	•	•	•	•
Grassy Meadow	C125	•	•	•	•	•
Green Tea	C174	•	•	•	•	•
Island Blue	C129	•	•	•	•	•
Jade	C173	•	•	•	•	•
Kettle Steam	C164	•	•	•	•	•
Lagoon	C171	•	•	•	•	•
Lava Rock	C163	•	•	•	•	•
London Fog	C139	•	•	•	•	•
Malt	C169	•	•	•	•	•
Midnight Twinkle	C128	•	•	•	•	•
Milk Thistle	C121	•	•	•	•	•
Misty Mountain	C161	•	•	•	•	•
Monstera	C176	•	•	•	•	•
Peanut Shell	C133	•	•	•	•	•
Poppy Red	C123	•	•	•	•	•
Rhubarb Pie	C122	•	•	•	•	•
Squash Blossom	C132	•	•	•	•	•
Squawk Box	C127	•	•	•	•	•
Stone Wash	C172	•	•	•	•	•
Stonehenge	C162	•	•	•	•	•
Truffle	C167	•	•	•	•	•
Velvet	C168	•	•	•	•	•
Winter Fleece	C137	•	•	•	•	•



Success Is in Our Science



Introducing an advancement in our proven Quantum Guard technology: Quantum Guard Elite. This patent pending technology provides the ultimate solution for all aspects of LVT performance.

- Highest scratch resistance in the industry
- Engineered for best-in-class dimensional stability
- Superior impact resistance
- Cuts cleanly for highest quality installation
- Easy no-polish maintenance significantly reduces overall life cycle cost and total cost of ownership
- Advanced stain resistance

Outperforms in Scratch Resistance

Quantum Guard Elite


Leading Competitor

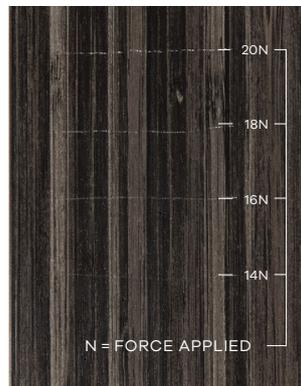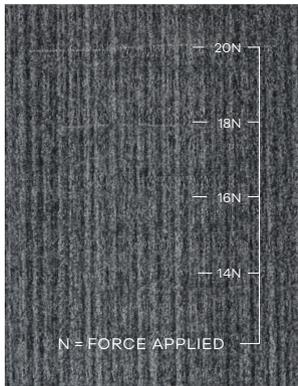

With a patent-pending two-part wear layer and aluminum oxide infused top coat, Quantum Guard Elite offers superior scratch resistance vs. the leading competitor.

Complete Multi-Layered Protection



Quantum Guard Elite combines a hard wear layer and a flexible wear layer for superior durability with the added protection of our proprietary aluminum oxide technology.

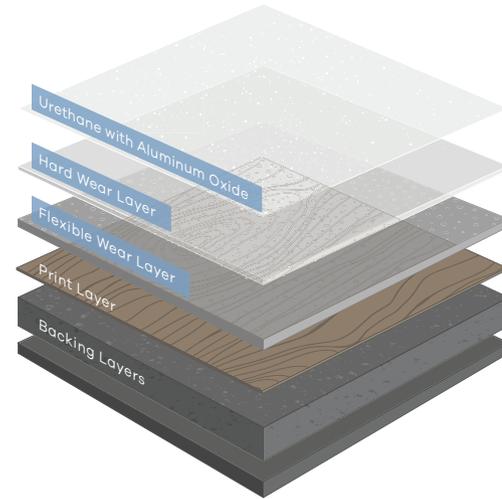

Best-in-Class Dimensional Stability

Quantum Guard Elite

Leading Competitor

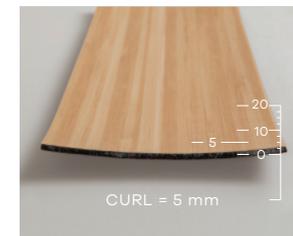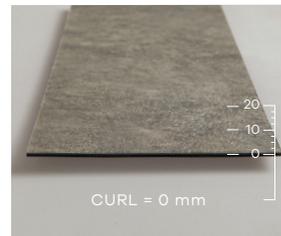

LVT with Quantum Guard Elite is fully engineered to offer the perfect balance of hardness and flexibility, which helps prevent product failures in commercial environments. Products exposed to 80 °C for six hours.

Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

Color Anchor LVT Collection

Style	Groove, Stride
Construction	Luxury Vinyl Tile Non-ortho Phthalate
Classification	ASTM F1700 Class III, Type B
Total Thickness	0.098" (2.5 mm)
Wear Layer Thickness	20 mil (0.51 mm)
Wear Layer	Quantum Guard Elite®
Edge Treatment	Bevel or Unbevel
Sizes	6" x 36" (152 x 915 mm) 12" x 24" (305 x 610 mm) 18" x 18" (457 x 457 mm)
Colors	29 colors per style
Packaging	6" x 36" - 30 pcs, 45 ft ² (4.181 m ²), 33.53 lbs (15.21 kg) 12" x 24" - 18 pcs, 36 ft ² (3.345 m ²), 26.82 lbs (12.17 kg) 18" x 18" - 12 pcs, 27 ft ² (2.508 m ²), 20.12 lbs (9.126 kg) Packaging may differ for QuickStix®
Adhesive	Porous & Non-porous Substrates: V-88 Full Spread MoistureLoc Full Spread, One Component V95 Full Spread, 2-part Epoxy XpressStep for LVT & Sheet Vinyl Full Coverage Spray <small>Note: Must use V-95, MoistureLoc, QuickStix or XpressStep adhesive under stationary heavy point loads. In more abusive conditions such as areas subject to dragging force, direct sunlight or where topical moisture would be a concern, only V-95, MoistureLoc or QuickStix should be used.</small>
QuickStix®	Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.
Installation Method	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.
Testing	
HUD/FHA	Passes
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/lin ft
Squareness (ASTM F540)	Passes - Max 0.010"
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²
Smoke Density (ASTM E662)	Passes - ≤ 450
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber
Resistance to Light (ASTM F1515)	Passes
Chemical Resistance (ASTM F925)	Passes
Resistance to Heat (ASTM F1514)	Passes
Environmental Data	
Rapidly Renewable Content	Contains 2% rapidly renewable resource content
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017
Product Declarations	Third Party Verified EPD, HPD
Carbon Offset	105% (Cradle to Gate (A1-A3); visit website for more information)
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl™ Verified Silver
Warranty	
	Limited 15-Year Commercial Warranty Limited 15-Year Quantum Guard Elite® Wear Warranty

Due to the unique nature of this pattern and tonal variations, shading may appear when mixing tiles during installation and in certain lighting conditions. This characteristic is not a defect, but rather adds depth and dimension to the final look and contributes to the overall aesthetic. We always recommend reviewing the tile arrangement to achieve your desired aesthetic.