



Google Collection

Mannington
COMMERCIAL



Cover: Telejector (Modular) - Dynasphere 22643, Phenomena (Modular) - Cybernetic 81637,
Mannington Assurance III - Marl 16345
Carpet Installation - Monolithic
Above: Telejector (Broadloom) - Aquatomic 31645



Multiplexer (Broadloom) - Seacopter 43636 **Phenomena** (Broadloom) - Repeletron 33642





Multiplexer (Modular) - Cycloplane 11633, Helmetron 13634, Geotron 41635
Carpet Installation - Monolithic





Skyway (Broadloom) - Phantom 32641

Crafted to Coordinate

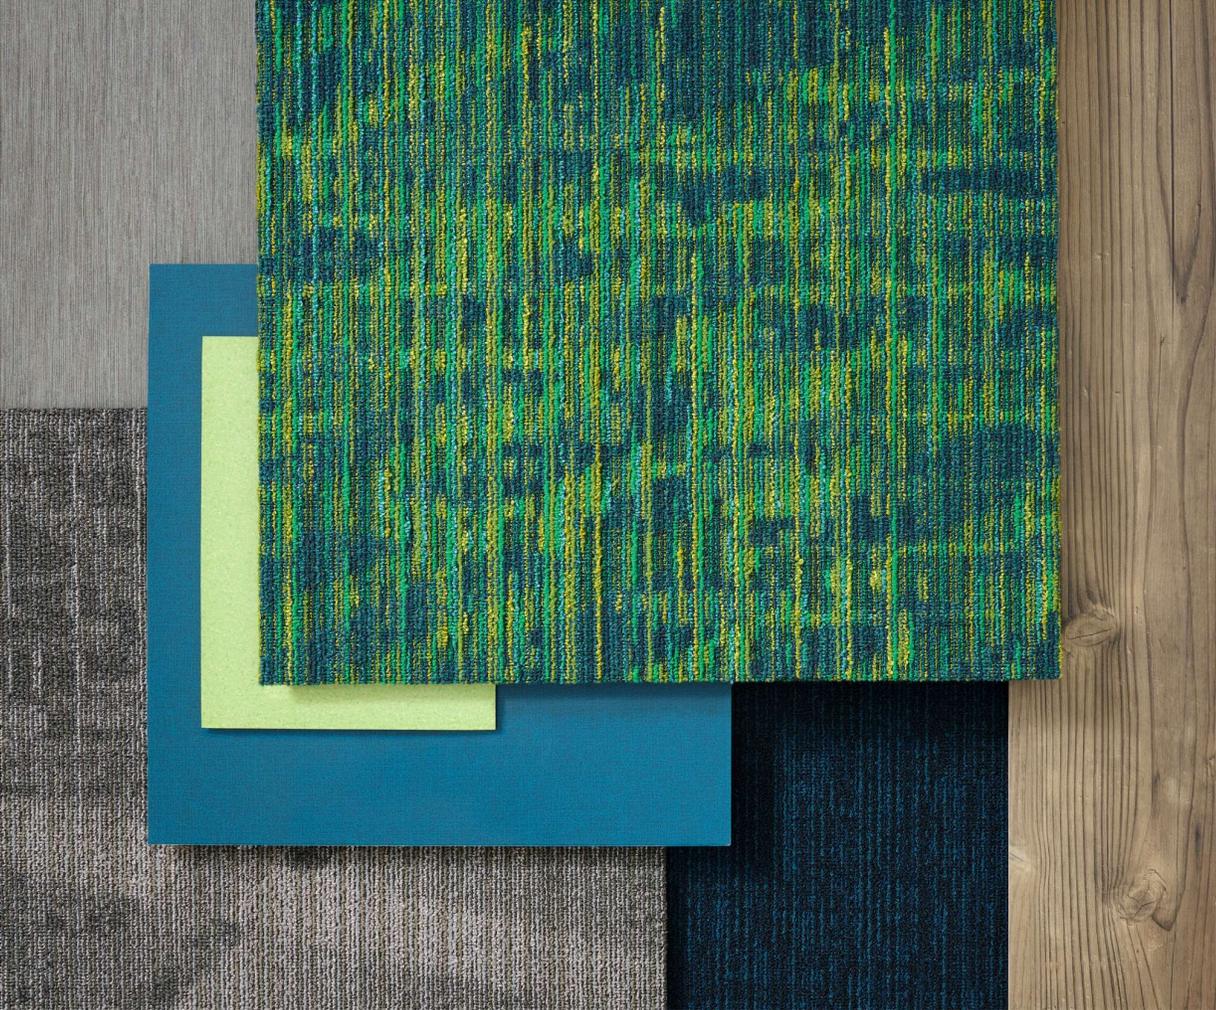

- 1. Color Anchor LVT, Stride, Chinchilla
- 2. Gogie, Telejector, Helmetron
- 3. Gogie, Skyway, Seacopter
- 4. Color Anchor Sheet, Prism, Snowpea
- 5. Amtico Anthology, City Grid, Pattern
- 6. Spacia Wood, Smoked Cedar
- 7. Color Anchor Carpet, Rumpus

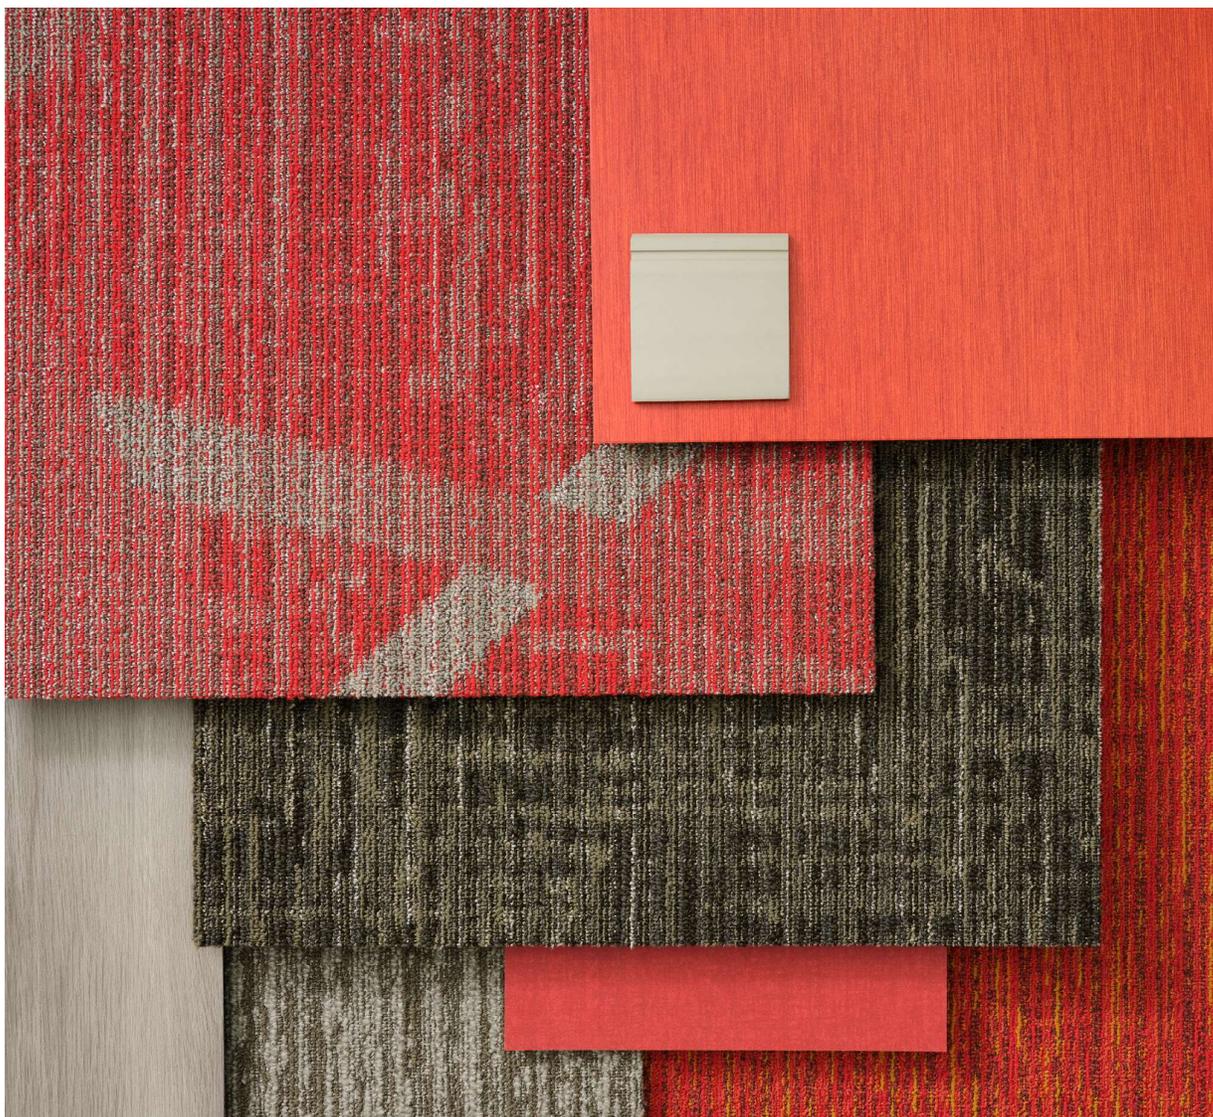

- 1. Gogie, Telejector, Atomicron
- 2. Spacia Wood, Nordic Oak
- 3. Gogie, Multiplexer, Retroscope
- 4. Intrinsic, Merge, Fairness
- 5. Edge Effects, 4.25" Etched, Flax
- 6. Color Anchor LVT, Stride, Snapdragon
- 7. Color Anchor Sheet, Arc, Allegro Poppy
- 8. Gogie, Phenomena, Solartron

Proven by Third-Party Testing

All of our carpet products are third-party tested and proven to exceed industry standards in appearance retention, texture retention, fire safety factors and static generation, and our modular carpet exceeds industry standards in dimensional stability—so you can be sure that the carpet you specify will perform for years to come.



Easier to Maintain

- > All the carpet fiber we use delivers greater resilience against matting and resists abrasive wear, keeping the carpet looking better.
- > XGUARD® Stain Resistant Technology provides long-term stain resistance for our space dye products.
- > ColorSafe® Bleach Resistant Technology resists color fade-out from bleach spills for our space dye products.
- > Moisture-barrier backings are built to withstand aggressive wet cleanings.

TARR

- > Googie Collection carpet was specifically designed with a 3.5 TARR rating for use in severe environments with rigorous foot traffic situations such as public areas, lobbies and dining facilities as well as transportation service areas such as airports. The TARR on our carpets is tested and verified by an independent lab.

Sustainable Solutions

- > Supported with EPDs and HPDs.
- > Infinity® 2 Modular and Integra® HP broadloom backings are NSF/ANSI 140 Gold Certified and contain recycled content.
- > UltraBac® RE broadloom backing is NSF/ANSI 140 Platinum Certified and contains a minimum of 10% post-consumer recycled content.

Backing Advantages

- > Infinity® 2 Modular backing provides exceptional performance with a moisture barrier.
- > UltraBac® RE broadloom backing offers strong performance and excellent environmental benefits.
- > Integra® HP is a high-performance broadloom backing with an impermeable moisture barrier, featuring a limited lifetime wick-back warranty.


Carpet with Antron® Fiber




Antron® type 6,6 nylon is engineered with stain and soil protection and offers long-lasting texture retention. Antron® fiber is designed for a more effective, longer-lasting clean, helping to reduce your total cost of ownership and contributing to a cleaner facility.

Better Shape, Better Performance



Antron® fiber has a sturdy, 4-hole hollow filament shape that makes it more resistant to crushing and matting than type 6 nylon fiber.



Antron® Fiber
4-hole hollow filament
< 1.5 MR (Modification Ratio)




Common Type 6 Nylon
trilobal filament
+ 2 MR (Modification Ratio)




Soil Resistance

Unlike a typical type 6 nylon fiber, the unique shape and low modification ratio of Antron® fiber does not provide anywhere for dirt to collect. This ensures better soil release during vacuuming and hot water extraction. Between cleanings, the 4-hole hollow filament structure also diffuses light, reducing the appearance of soil and helping the carpet look cleaner.



Antron® Fiber
4-hole hollow filament



Common Type 6 Nylon
trilobal filament

XGUARD® Stain Resistance

Carpets with Mannington Commercial's proprietary XGUARD® stain resistant technology offer the highest level of performance in permanent stain resistance. Protection against common stains as well as ease of maintenance result in long-term appearance retention and extend the life of the carpet.

ColorSafe® Bleach Resistance

Mannington Commercial's ColorSafe® bleach resistant technology works from within the fiber to protect carpets against bleach and maintain colorfastness. Carpets with ColorSafe® are protected from occasional spills and drips of diluted disinfecting bleach solution, ensuring that colors remain bright and that the carpet can withstand the toughest cleaning conditions.

Crafted with Purpose.

Antron and the Antron family of marks and logos are trademarks of INVISTA.

No Moisture Testing Required*

Solutions crafted for high-moisture conditions. Defeat moisture issues with carpet backings that do not require moisture testing*.

We have solutions for broadloom and modular carpet to make moisture worries evaporate. From backing options to adhesives to a dry installation system, explore solutions that defeat moisture concerns while enhancing the performance of your floor.

	Infinity 2 Pressure Sensitive Adhesive	XpressStep™ Spray Adhesive	FreLock Tabs	Integra-2 Adhesive	Ultra Adhesive
Infinity® 2 Modular Backing	✓	✓	✓		
Infinity® 2 MG Modular Backing	✓	✓	✓		
Infinity® 2 MG Cushion Modular Backing	✓	✓			
Integra® HP Broadloom Backing				✓	
UltraBac® RE Broadloom Backing					✓

* Assumes intact vapor barrier, no standing water or stained concrete, no hydrostatic pressure, and for our broadloom backings (Integra® HP and UltraBac® RE) pH levels must never exceed 10. Please refer to our installation instructions for further details.

Googie Collection

Style	Multiplexer (Broadloom)	Multiplexer (Modular)	Phenomena (Broadloom)
Construction	Patterned Loop	Patterned Loop	Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution/Yarn	Solution/Yarn	Solution/Yarn
Gauge	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	10.33 (40.67 per 10 cm)	10.33 (40.67 per 10 cm)	10 (39.37 per 10 cm)
Density	7,826 (290.90 kg/m ³)	7,826 (290.90 kg/m ³)	7,659 (284.59 kg/m ³)
Pile Thickness	0.092" (2.34 mm)	0.092" (2.34 mm)	0.094" (2.39 mm)
Weight	20 oz/yd ² (678 g/m ²)	20 oz/yd ² (678 g/m ²)	20 oz/yd ² (678 g/m ²)
Backing Type	UltraBac® RE, Integra® HP	Infinity® 2 Modular	UltraBac® RE, Integra® HP
Size/Width	12'6" (3.81 cm)	24" x 24" (60.96 x 60.96 cm)	12'6" (3.81 cm)
Colors	12	12	12
Pattern Repeat	56 1/4" W x 61" L (Random)	N/A	18 3/4" W x 21" L (Random)
Packaging	N/A	8 yd ² / 18 Tiles	N/A
Adhesive	Ultra Adhesive Integra-2 Adhesive	Infinity 2 Adhesive	Ultra Adhesive Integra-2 Adhesive
Installation Method	N/A	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar	N/A
Testing			
Dimensional Stability (Aachen Test)	Passes		
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV		
Flooring Radiant Panel (ASTM E648)	Passes - Class 1 ≥ 0.45 watts/cm ²		
Smoke Density (ASTM E662)	Passes ≤ 450		
Methenamine Pill Test (ASTM D2859)	Passes		
Hexapod (ASTM D5252) TARR	3.5 - severe		
Environmental Data			
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold, UltraBac® RE - Gold, Integra® HP - Gold		
Recycled Content	Contains recycled content		
Indoor Air Quality	CRI Green Label Plus Certified		
Product Declarations	Third Party Verified EPD, HPD		
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information		
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 -Low Emitting Materials		
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information		
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered		
Warranty			
	Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty		

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

Googie Collection

Style	Phenomena (Modular)	Skyway (Broadloom)	Skyway (Modular)
Construction	Patterned Loop	Patterned Loop	Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution/Yarn	Solution/Yarn	Solution/Yarn
Gauge	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	10 (39.37 per 10 cm)	9.83 (37.70 per 10 cm)	9.83 (37.70 per 10 cm)
Density	7,659 (284.59 kg/m³)	7,135 (265.12 kg/m³)	7,135 (265.12 kg/m³)
Pile Thickness	0.094" (2.39 mm)	0.111" (2.81 mm)	0.111" (2.81 mm)
Weight	20 oz/yd² (678 g/m²)	22 oz/yd² (746 g/m²)	22 oz/yd² (746 g/m²)
Backing Type	Infinity® 2 Modular	UltraBac® RE, Integra® HP	Infinity® 2 Modular
Size/Width	24" x 24" (60.96 x 60.96 cm)	12'6" (3.81 m)	24" x 24" (60.96 x 60.96 cm)
Colors	12	12	12
Pattern Repeat	N/A	78" W x 168" L (Random)	N/A
Packaging	8 yd² / 18 Tiles	N/A	8 yd² / 18 Tiles
Adhesive	Infinity 2 Adhesive	Ultra Adhesive Integra-2 Adhesive	Infinity 2 Adhesive
Installation Method	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar	N/A	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar
Testing			
Dimensional Stability (Aachen Test)	Passes		
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV		
Flooring Radiant Panel (ASTM E648)	Passes - Class 1 ± 0.45 watts/cm²		
Smoke Density (ASTM E662)	Passes ≤ 450		
Methenamine Pill Test (ASTM D2859)	Passes		
Hexapod (ASTM D5252) TARR	3.5 - severe		
Environmental Data			
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold, UltraBac® RE - Gold, Integra® HP - Gold		
Recycled Content	Contains recycled content		
Indoor Air Quality	CRI Green Label Plus Certified		
Product Declarations	Third Party Verified EPD, HPD		
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information		
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 -Low Emitting Materials		
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information		
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered		
Warranty			
	Limited Lifetime Wear & Backing Warranty Limited 15-Year XGUARD® Stain Resistant Warranty Limited 15-Year ColorSafe® Bleach Resistant Warranty		

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

Googie Collection

Style	Telejector (Broadloom)	Telejector (Modular)
Construction	Patterned Loop	Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution/Yarn	Solution/Yarn
Guage	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	10.33 (40.67 per 10 cm)	10.33 (40.67 per 10 cm)
Density	7,058 (262.26 kg/m ³)	7,058 (262.26 kg/m ³)
Pile Thickness	0.102" (2.59 mm)	0.102" (2.59 mm)
Weight	20 oz/yd ² (678 g/m ²)	20 oz/yd ² (678 g/m ²)
Backing Type	UltraBac® RE, Integra® HP	Infinity® 2 Modular
Size/Width	12'6" (3.81 m)	24" x 24" (60.96 x 60.96 cm)
Colors	12	12
Pattern Repeat	78" W x 71" L (Random)	N/A
Packaging	N/A	8 yd ² / 18 Tiles
Adhesive	Ultra Adhesive Integra-2 Adhesive	Infinity 2 Adhesive
Installation Method	N/A	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Methenamine Pill Test (ASTM D2859)	Passes	
Hexapod (ASTM D5252) TARR	3.5 - severe	
Environmental Data		
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold, UltraBac® RE - Gold, Integra® HP - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered	
Warranty		
	Limited Lifetime Wear & Backing Warranty	
	Limited 15-Year XGUARD® Stain Resistant Warranty	
	Limited 15-Year ColorSafe® Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.