




Design Locale Tucson Collection

Mannington
COMMERCIAL

Experience the Sonoran Desert

Six interior designers from the Southeast headed west with Mannington to Arizona's Sonoran Desert for a 24-hour design immersion. The objective was a collection of modular carpet inspired by the natural beauty and built environments of the desert. Together, we created a carpet collection that reminds us that beauty and design inspiration, pattern and color can bloom anywhere. Unexpected layering of texture and color create an intriguing interplay of patterns, creating a cohesive design statement that emphasizes gradations of texture and subtle, yet complex palettes.

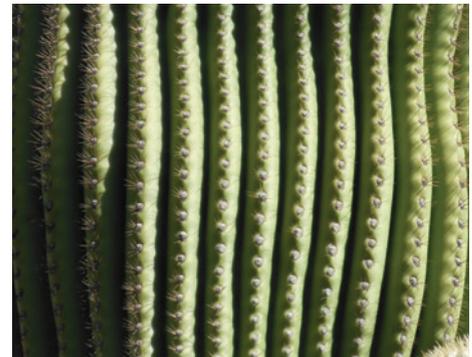



Cover: Presidio (Modular) - Mica 11160, **Installation** - Herringbone
Above: Sanctum (Modular) - Mica 11160, **Installation** - 3-Step Vertical Ashlar



Rain Shadow (Modular) - Dune 81161
Installation - 3-Step Vertical Ashlar



Arroyo (Modular) - Mica 11160
Installation - 3-Step Vertical Ashlar

Design Locale Tucson Collection

| Style | Arroyo (Modular) | Presidio (Modular) |
|--------------------------------------|--|---|
| Construction | Patterned Loop | Patterned Loop |
| Face Fiber | Type 6,6 Nylon | Type 6,6 Nylon |
| Dye Method | Solution | Solution |
| Guage | 1/10 (39.37 per 10 cm) | 1/10 (39.37 per 10 cm) |
| Stitches Per Inch | 9.25 (36.42 per 10 cm) | 9.25 (36.42 per 10 cm) |
| Density | 8,105 (301.16 kg/m ³) | 7,466 (277.42 kg/m ³) |
| Pile Thickness | 0.151" (3.84 mm) | 0.135" (3.43 mm) |
| Weight | 34 oz/yd ² (1,153 g/m ²) | 28 oz/yd ² (949 g/m ²) |
| Backing Type | Infinity® 2 Modular | Infinity® 2 Modular |
| Size | 12" x 48" (30.48 x 121.92 cm) | 12" x 48" (30.48 x 121.92 cm) |
| Colors | 12 | 12 |
| Packaging | 8.00 yd ² / 18 Tiles | 8.00 yd ² / 18 Tiles |
| Adhesive | Infinity 2 Adhesive | Infinity 2 Adhesive |
| Installation Method | 3-Step Vertical Ashlar | Herringbone, 3-Step Vertical Ashlar |
| Testing | | |
| Dimensional Stability (Aachen Test) | Passes | |
| Electrostatic Propensity (AATCC 134) | Less than 3.0 kV | |
| Flooring Radiant Panel (ASTM E648) | Passes - Class 1; ≥ 0.45 watts/cm ² | |
| Smoke Density (ASTM E662) | Passes - ≤ 450 | |
| Methenamine Pill Test (ASTM D2859) | Passes | |
| Hexapod (ASTM D5252) TARR | 3.5 - severe | |
| Environmental Data | | |
| NSF/ANSI 140 Certification | Infinity® 2 Modular - Gold | |
| Recycled Content | Contains recycled content | |
| Indoor Air Quality | CRI Green Label Plus Certified | |
| Product Declarations | Third Party Verified EPD, HPD | |
| Carbon Offset | 105% Cradle to Gate (A1 - A3), visit website for more information | |
| LEED | May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials | |
| mindful MATERIALS | Visit mindfulmaterials.com for current transparency information | |
| Manufacturing | Calhoun, GA (USA) - ISO 14001 Registered | |
| Warranty | | |
| | Limited Lifetime Wear & Backing Warranty | |
| | Limited 15-Year XGUARD® Stain Resistant Warranty | |
| | Limited 15-Year ColorSafe® Bleach Resistant Warranty | |

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Cut piles, cut and loops and tip-sheared constructions are not recommended for heavy commercial traffic, corridors or through channeled traffic. Please contact your Mannington Commercial representative for information regarding these constructions and your specific end use application.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

Design Locale Tucson Collection

| Style | Rain Shadow (Modular) | Sanctum (Modular) |
|---|--|---|
| Construction | Tip-Sheared Patterned Loop | Tip-Sheared Patterned Loop |
| Face Fiber | Type 6,6 Nylon | Type 6,6 Nylon |
| Dye Method | Solution | Solution |
| Guage | 1/10 (39.37 per 10 cm) | 1/10 (39.37 per 10 cm) |
| Stitches Per Inch | 10.66 (41.97 per 10 cm) | 9.66 (38.03 per 10 cm) |
| Density | 7,529 (279.76 kg/m ³) | 8,408 (312.42kg/m ³) |
| Pile Thickness | 0.153" (3.89 mm) | 0.137" (3.48 mm) |
| Weight | 32 oz/yd ² (1,085 g/m ²) | 32 oz/yd ² (1,085 g/m ²) |
| Backing Type | Infinity [®] 2 Modular | Infinity [®] 2 Modular |
| Size | 12" x 48" (30.48 x 121.92 cm) | 12" x 48" (30.48 x 121.92 cm) |
| Colors | 12 | 6 |
| Packaging | 8.00 yd ² / 18 Tiles | 8.00 yd ² / 18 Tiles |
| Adhesive | Infinity 2 Adhesive | Infinity 2 Adhesive |
| Installation Method | Herringbone, 3-Step Vertical Ashlar | 3-Step Vertical Ashlar |
| Testing | | |
| Dimensional Stability (Aachen Test) | Passes | |
| Electrostatic Propensity (AATCC 134) | Less than 3.0 kV | |
| Flooring Radiant Panel (ASTM E648) | Passes - Class 1; ≥ 0.45 watts/cm ² | |
| Smoke Density (ASTM E662) | Passes - ≤ 450 | |
| Methenamine Pill Test (ASTM D2859) | Passes | |
| Hexapod (ASTM D5252) TARR | 3.5 - severe | |
| Environmental Data | | |
| NSF/ANSI 140 Certification | Infinity [®] 2 Modular - Gold | |
| Recycled Content | Contains recycled content | |
| Indoor Air Quality | CRI Green Label Plus Certified | |
| Product Declarations | Third Party Verified EPD, HPD | |
| Carbon Offset | 105% Cradle to Gate (A1 - A3), visit website for more information | |
| LEED | May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials | |
| mindful MATERIALS | Visit mindfulmaterials.com for current transparency information | |
| Manufacturing | Calhoun, GA (USA) - ISO 14001 Registered | |
| Warranty | | |
| | Limited Lifetime Wear & Backing Warranty | |
| | Limited 15-Year XGUARD [®] Stain Resistant Warranty | |
| | Limited 15-Year ColorSafe [®] Bleach Resistant Warranty | |

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Cut piles, cut and loops and tip-sheared constructions are not recommended for heavy commercial traffic, corridors or through channeled traffic. Please contact your Mannington Commercial representative for information regarding these constructions and your specific end use application.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.