



Intrinsic Collection

**Mannington**  
COMMERCIAL



**Cover:** Magnify (Modular) - Authenticity 13002, Justice 43016  
**Above:** Confluence (Modular) - Optimism 81010, Security 63014  
**Installation** - Vertical Ashlar





**Intertwine** (Modular) - Influence 11001  
**Installation** - Vertical Ashlar



**Intertwine** (Modular) - Optimism 81010, Security 63014  
**Installation** - Vertical Ashlar



Magnify (Modular) - Authenticity 13002  
Installation - Vertical Ashlar



Magnify (Modular) - Optimism 81010, Security 63014  
Installation - Vertical Ashlar



Merge (Modular) - Influence 11001  
Installation - Horizontal Brick Ashlar




Merge (Modular) - Optimism 81010; Security 63014; Fairness 81004  
Installation - Horizontal Brick Ashlar




**Confluence** (Modular) - Authenticity 13002  
**Installation** - Vertical Ashlar

Colorways

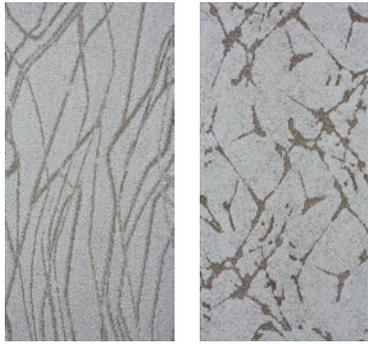


**Influence**

11001

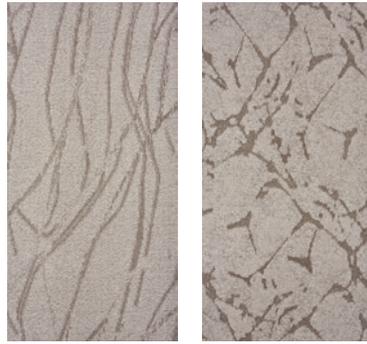


**Fairness**

81004

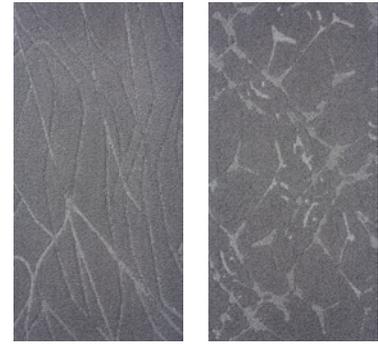


**Authenticity**

13002

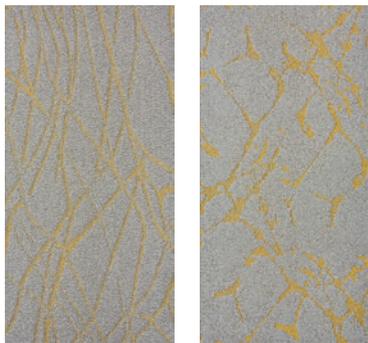


**Poise**

11007

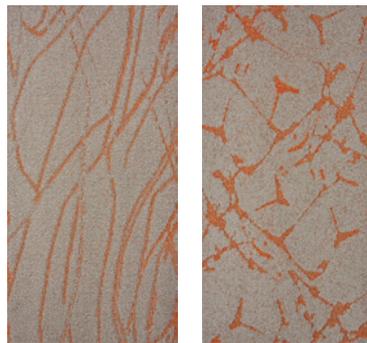



**Optimism**

81010

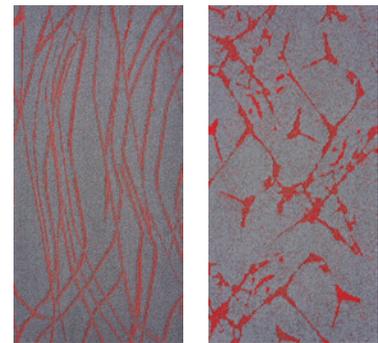


**Desire**

13008

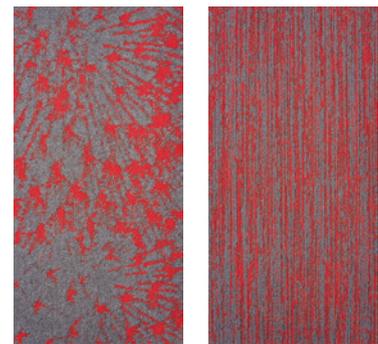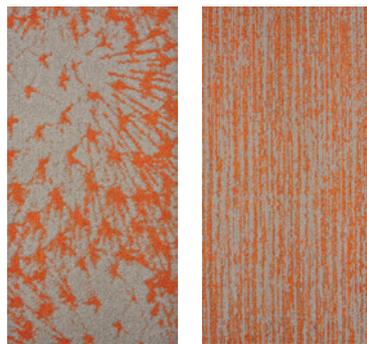

Colorways



**Compassion**






84005

**Identity**

15003

**Knowledge**

35006



**Growth**

84011


**Humor**

15009

**Honesty**

35012

Colorways

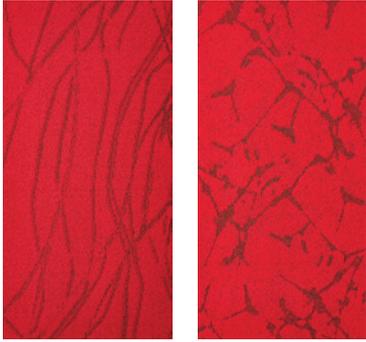


**Pleasure**





**74013**



**Justice**



**43016**




**Security**





**63014**



**Attitude**



**34015**



## Intrinsic Collection

Style	Confluence (Modular)	Intertwine (Modular)
Construction	Patterned Loop	Tip-Sheared Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution	Solution
Guage	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	11 (43.31 per 10 cm)	10.33 (40.67 per 10cm)
Density	6,646 (246.95 kg/m <sup>3</sup> )	5,684 (211.21 kg/m <sup>3</sup> )
Pile Thickness	0.130" (3.30 mm)	0.152" (3.86 mm)
Weight	24 oz/yd <sup>2</sup> (814 g/m <sup>2</sup> )	24 oz/yd <sup>2</sup> (814 g/m <sup>2</sup> )
Backing Type	Infinity <sup>®</sup> 2 Modular	Infinity <sup>®</sup> 2 Modular
Size	18" x 36" (45.72 cm x 91.44 cm)	18" x 36" (45.72 x 91.44 cm)
Colors	16	16
Packaging	8 yd <sup>2</sup> / 16 Tiles	8 yd <sup>2</sup> / 16 Tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	Vertical Ashlar	Vertical Ashlar
<b>Testing</b>		
Dimensional Stability (Aachen Test)	Passes	Passes
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	Less than 3.0 kV
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm <sup>2</sup>	Passes - Class 1; ≥ 0.45 watts/cm <sup>2</sup>
Smoke Density (ASTM E662)	Passes - ≤ 450	Passes - ≤ 450
Methenamine Pill Test (ASTM D2859)	Passes	Passes
Hexapod (ASTM D5252) TARR	4.0 - severe	3.5 - severe
<b>Environmental Data</b>		
NSF/ANSI 140 Certification	Infinity <sup>®</sup> 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit <a href="http://mindfulmaterials.com">mindfulmaterials.com</a> for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered	
<b>Warranty</b>		
	Limited Lifetime Wear & Backing Warranty	
	Limited 15-Year XGUARD <sup>®</sup> Stain Resistant Warranty	
	Limited 15-Year ColorSafe <sup>®</sup> Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to [manningtoncommercial.com](http://manningtoncommercial.com) or call 800.241.2262 ext. 6913.

## Intrinsic Collection

Style	Magnify (Modular)	Merge (Modular)
<b>Construction</b>	Textured Patterned Loop	Tip-Sheared Patterned Loop
<b>Face Fiber</b>	Type 6,6 Nylon	Type 6,6 Nylon
<b>Dye Method</b>	Solution	Solution
<b>Guage</b>	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
<b>Stitches Per Inch</b>	6 (32.61 per 10 cm)	11 (43.31 per 10cm)
<b>Density</b>	8,383 (311.49 kg/m <sup>3</sup> )	6,857 (254.79 kg/m <sup>3</sup> )
<b>Pile Thickness</b>	0.146" (3.71 mm)	0.126" (3.20 mm)
<b>Weight</b>	34 oz/yd <sup>2</sup> (1,153 g/m <sup>2</sup> )	24 oz/yd <sup>2</sup> (814 g/m <sup>2</sup> )
<b>Backing Type</b>	Infinity <sup>®</sup> 2 Modular	Infinity <sup>®</sup> 2 Modular
<b>Size</b>	18" x 36" (45.72 cm x 91.44 cm)	18" x 36" (45.72 x 91.44 cm)
<b>Colors</b>	16	16
<b>Packaging</b>	8 yd <sup>2</sup> / 16 Tiles	8 yd <sup>2</sup> / 16 Tiles
<b>Adhesive</b>	Infinity 2 Adhesive	Infinity 2 Adhesive
<b>Installation Method</b>	Vertical Ashlar	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar
<b>Testing</b>		
<b>Dimensional Stability (Aachen Test)</b>	Passes	
<b>Electrostatic Propensity (AATCC 134)</b>	Less than 3.0 kV	
<b>Flooring Radiant Panel (ASTM E648)</b>	Passes - Class 1; ≥ 0.45 watts/cm <sup>2</sup>	
<b>Smoke Density (ASTM E662)</b>	Passes - ≤ 450	
<b>Methenamine Pill Test (ASTM D2859)</b>	Passes	
<b>Hexapod (ASTM D5252) TARR</b>	4.0 - severe	
<b>Environmental Data</b>		
<b>NSF/ANSI 140 Certification</b>	Infinity <sup>®</sup> 2 Modular - Gold	
<b>Recycled Content</b>	Contains recycled content	
<b>Indoor Air Quality</b>	CRI Green Label Plus Certified	
<b>Product Declarations</b>	Third Party Verified EPD, HPD	
<b>Carbon Offset</b>	105% Cradle to Gate (A1 - A3), visit website for more information	
<b>LEED</b>	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
<b>mindful MATERIALS</b>	Visit <a href="http://mindfulmaterials.com">mindfulmaterials.com</a> for current transparency information	
<b>Manufacturing</b>	Calhoun, GA (USA) - ISO 14001 Registered	
<b>Warranty</b>		
	Limited Lifetime Wear & Backing Warranty	
	Limited 15-Year XGUARD <sup>®</sup> Stain Resistant Warranty	
	Limited 15-Year ColorSafe <sup>®</sup> Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to [manningtoncommercial.com](http://manningtoncommercial.com) or call 800.241.2262 ext. 6913.