



Swell Collection

Mannington
COMMERCIAL



Cover: Eventide (Modular) - Vapor 11250, Hightide (Modular) - Seabed 41260

Carpet Installation - Vertical Ashlar



Above: Colorcast (Modular) - Uncharted 43257, Hightide (Modular) - Uncharted 43262, Spacia Stone - Gallery Concrete SS5S3071

Carpet Installation - Horizontal Brick Ashlar





Castline - Billow 33253
Carpet Installation - Horizontal Brick Ashlar

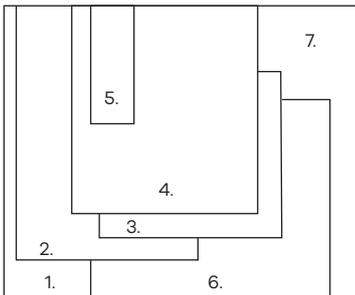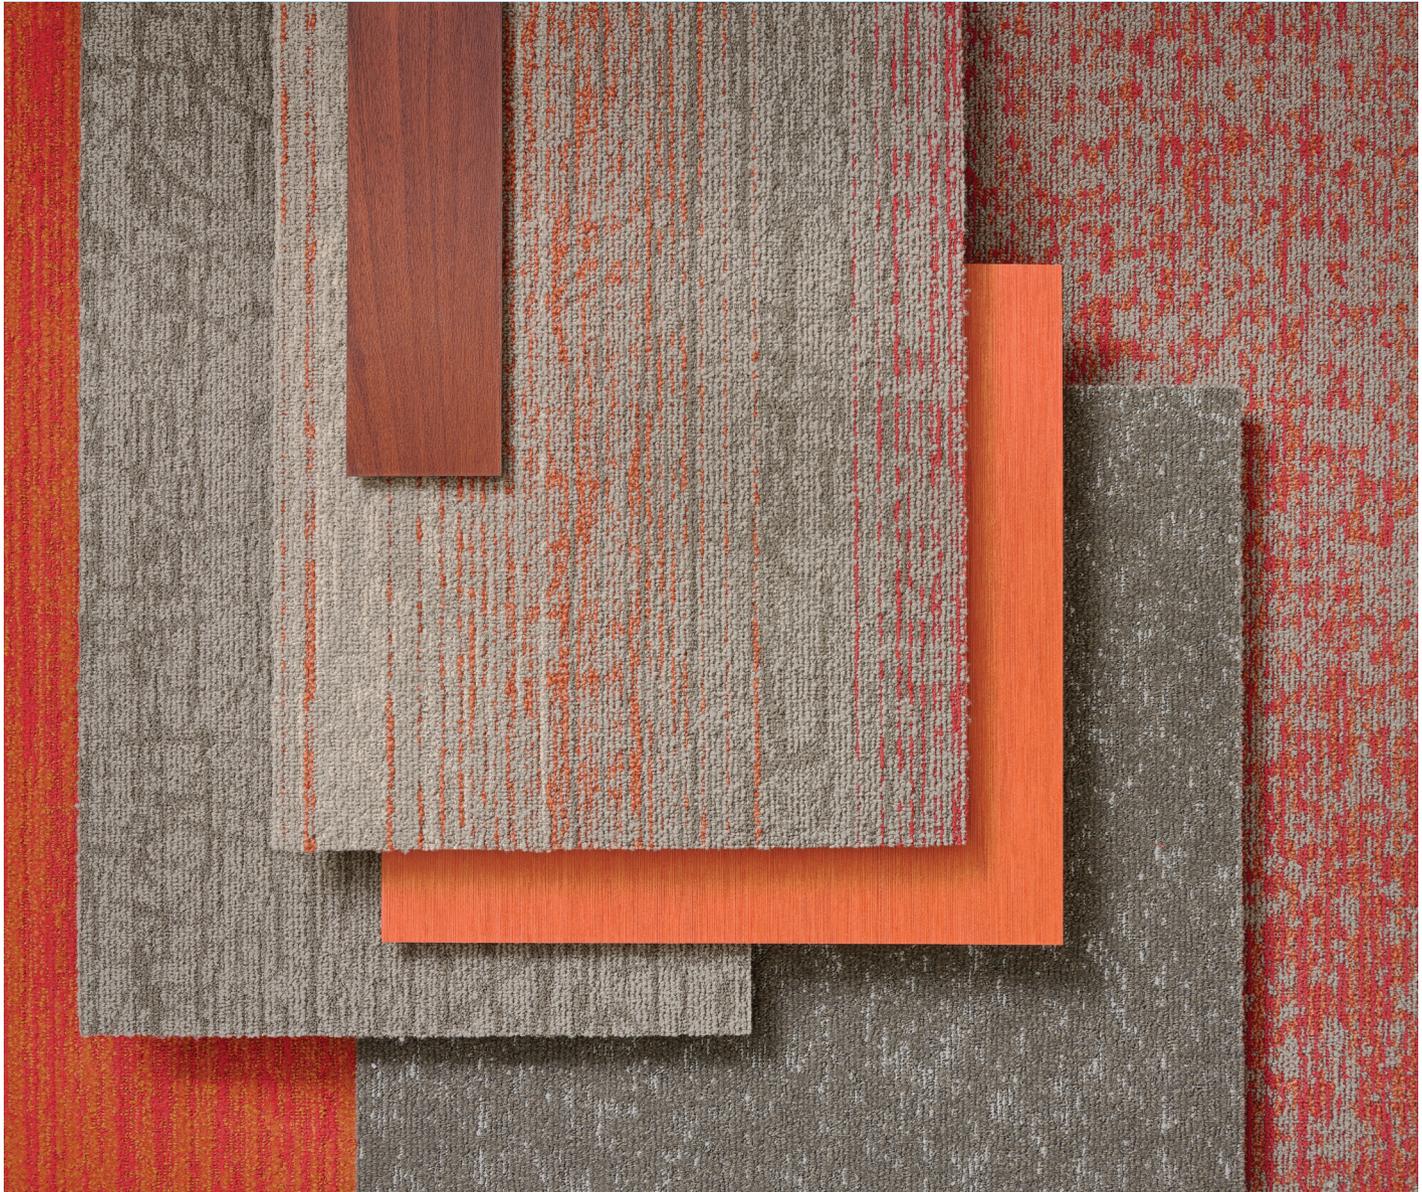

- 1. Intrinsic, Merge, Security
- 2. Swell, Castline, Inland
- 3. Color Anchor LVT, Stride, Squash Blossom
- 4. Swell, Colorcast, Sunlit
- 5. Spacia, Wood, Mahogany

- 6. Heirloom, Souvenir, Loket
- 7. Swell, Hightide, Sunlit





Eventide - Hollow 14254, **Hightide** - Port 14264
Carpet Installation - Vertical Ashlar

Harmony with Nature

Invisible on its own, a gust of wind is given shape when captured in the sails of a boat, or rippling across the surface of the sea. The unseen billows become visible, transforming our surroundings into shifting shapes of undulating lines and stippled, organic textures. In the Swell Collection, layered gradations of neutrals emulate the dance of light and shadow on ocean waves, while bright accents reflect the brilliant colors of the Maine coastline. With Swell, an inspiring sense of quiet energy begins to take shape.

Crafted with Purpose.

Mannington[®]
COMMERCIAL

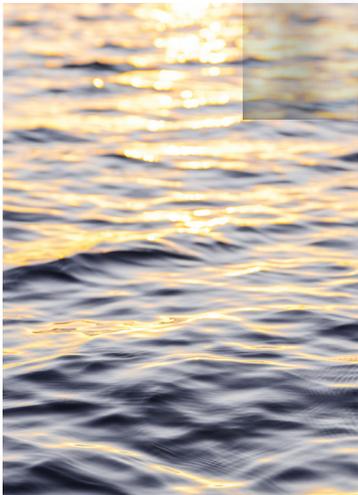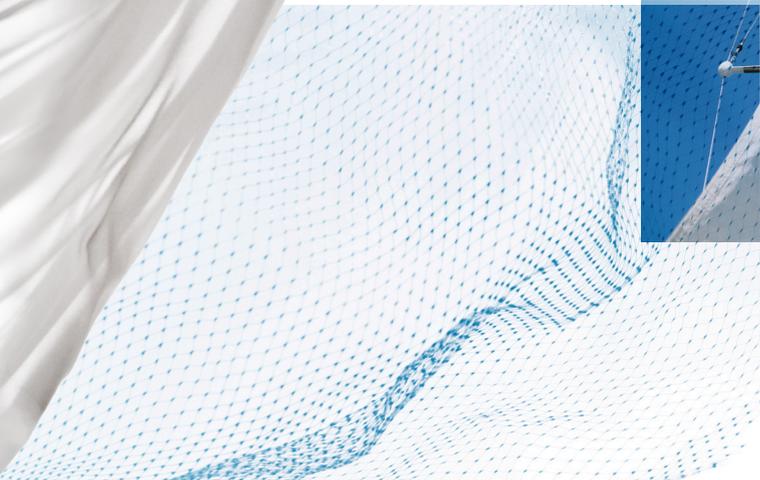



BurkeBase® Premium TS Molded Wall Base- 190 Jackalope, Color Anchor LVT, Stride - Flannel C146

Available Profile Heights	BurkeBase® Premium TS Molded 1/8"	BurkeBase® Type TP 1/8"	BurkeBase® Type TV 1/8"	BurkeBase® Type TV .080"
	4" (102 mm)	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)
	6" (152 mm)	4" (102 mm)	4" (102 mm)	4" (102 mm)
		4.5" (114 mm)	4.5" (114 mm)	6" (152 mm)
		6" (152 mm)	6" (152 mm)	
	Coved	Coved or Toeless	Coved or Toeless	Coved or Toeless

Warranty This product is backed by our Limited 5-Year Commercial Warranty.

Corners BurkeBase® Premium Type TS factory molded corners are available with 4" and 6" coved corners. Must be ordered at time of wall base order to ensure color match.

BurkeBase® Type TP/TV pre-formed corners are available in all profile heights. Must be ordered at time of wall base order to ensure color match.

Custom Colors Minimums apply.

Please make final selection for all colors from actual product samples.

For samples and information, visit manningtoncommercial.com or call 800.241.2262.



Design Solutions


Whether you're looking for design support from the start of a project or in the final phase, Mannington's Design Solutions team can help. Our team of designers is here to support you, our customers, through every step of the design process, from concept to installation.

Your Vision Realized

Our team of designers with diverse backgrounds in interior design, graphic design and textile design will work with you to provide solutions, knowledge and options to simplify the design process and bring your vision to life.

Deliverables

- > Product Palettes
- > 2D and 3D Renderings
- > Composites
- > Configurations
- > Finished Plans
- > Rendered Floor Plan
- > Estimates
- > Installation Diagrams
- > Revit Files
- > Construction Documents

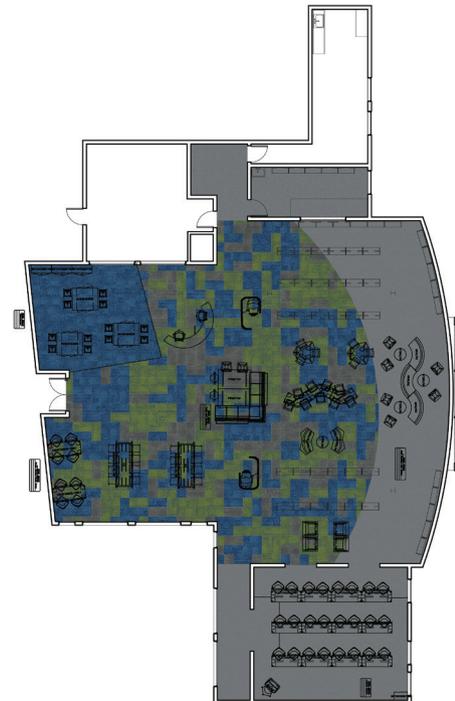

No Moisture Testing Required*

Solutions crafted for high-moisture conditions. Defeat moisture issues with carpet backings that do not require moisture testing*.

We have solutions for broadloom and modular carpet to make moisture worries evaporate. From backing options to adhesives to a dry installation system, explore solutions that defeat moisture concerns while enhancing the performance of your floor.

	Infinity 2 Pressure Sensitive Adhesive	XpressStep™ Spray Adhesive	FreLock Tabs	Integra-2 Adhesive	Ultra Adhesive
Infinity® 2 Modular Backing	✓	✓	✓		
Infinity® 2 MG Modular Backing	✓	✓	✓		
Infinity® 2 MG Cushion Modular Backing	✓	✓			
Integra® HP Broadloom Backing				✓	
UltraBac® RE Broadloom Backing					✓

* Assumes intact vapor barrier, no standing water or stained concrete, no hydrostatic pressure, and for our broadloom backings (Integra® HP and UltraBac® RE) pH levels must never exceed 10. Please refer to our installation instructions for further details.

Carpet Performance

Our broadloom and modular carpets are constructed with premium raw materials and withstand rigorous testing to provide you with flooring that will meet the needs of every commercial space.



Proven by Third-Party Testing

Every carpet we make at Mannington Commercial is third-party tested and proven to exceed industry standards in appearance retention, texture retention, fire safety factors and static generation, and our modular carpet exceeds industry standards in dimensional stability—so you can be sure that the carpet you specify will perform for years to come.

Easier to Maintain

- > The molecular structure of Universal type 6,6 fiber is a tight symmetrical unit with 6+6 hydrogen atoms combined in direct alignment for greater strength and resiliency
- > Universal's modified delta shape allows dirt to settle without staining for quick and easy cleanup
- > XGUARD® Stain Resistant Technology provides long-term stain resistance for our space dye products.
- > ColorSafe® Bleach Resistant Technology resists color fade-out from bleach spills for our space dye products.
- > Moisture-barrier backings are built to withstand aggressive wet cleanings.

TARR

- > Swell carpet was specifically designed with a minimum of 3.5 TARR rating for use in severe environments with rigorous foot traffic. This includes public areas, lobbies and dining facilities as well as transportation service areas such as airports. Our TARR rating is tested and verified by an independent lab

Sustainable Solutions

- > Supported with EPDs and HPDs.
- > Infinity® 2 Modular backing is NSF/ANSI 140 Gold Certified and contains recycled content.
- > UltraBac® RE broadloom backing is NSF/ANSI 140 Platinum Certified and contains a minimum of 10% post-consumer recycled content.
- > Universal Fibers products align with a variety of environmental initiatives including LEED®, Living Building Challenge and WELL Building Standard®

Backing Advantages

- > Infinity® 2 Modular backing provides exceptional performance with a moisture barrier.
- > Infinity® 2 Modular backing offers superior tuft bind and dimensional stability with a limited lifetime warranty.
- > UltraBac® RE broadloom backing offers strong performance and excellent environmental benefits with a limited lifetime warranty.

Swell Collection

Style	Castline (Modular)	Colorcast (Modular)
Construction	Patterned Loop	Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution	Solution
Guage	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	9.66 (38.03 per 10 cm)	9.66 (38.03 per 10 cm)
Density	6,072 (225.62 kg/m ³)	6,072 (225.62 kg/m ³)
Pile Thickness	0.083" (2.1 mm)	0.083" (2.1 mm)
Weight	14 oz/yd ² (475 g/m ²)	14 oz/yd ² (475 g/m ²)
Backing Type	Infinity [®] 2 Modular	Infinity [®] 2 Modular
Size	18" x 36" (45.72 x 91.44 cm)	18" x 36" (45.72 cm x 91.44 cm)
Colors	5	5
Packaging	8 yd ² / 16 Tiles	8 yd ² / 16 Tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	Horizontal Brick Ashlar	Horizontal Brick Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Methenamine Pill Test (ASTM D2859)	Passes	
Hexapod (ASTM D5252) TARR	3.5 - severe	
Environmental Data		
NSF/ANSI 140 Certification	Infinity [®] 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered	
Warranty		
	Limited Lifetime Wear & Backing Warranty	
	Limited 15-Year XGUARD [®] Stain Resistant Warranty	
	Limited 15-Year ColorSafe [®] Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Cut piles, cut and loops and tip-sheared constructions are not recommended for heavy commercial traffic, corridors or through channeled traffic. Please contact your Mannington Commercial representative for information regarding these constructions and your specific end use application
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.

Swell Collection

Style	Eventide (Modular)	Hightide (Modular)
Construction	Patterned Loop	Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution	Solution
Guage	5/64 (50.39 per 10 cm)	5/64 (50.39 per 10 cm)
Stitches Per Inch	10.33 (40.67 per 10 cm)	10.33 (40.67 per 10 cm)
Density	7,200 (267.54 kg/m ³)	7,200 (267.54 kg/m ³)
Pile Thickness	0.070" (1.78 mm)	0.070" (1.78 mm)
Weight	14 oz/yd ² (475 g/m ²)	14 oz/yd ² (475 g/m ²)
Backing Type	Infinity [®] 2 Modular	Infinity [®] 2 Modular
Size	18" x 36" (45.72 x 91.44 cm)	18" x 36" (45.72 cm x 91.44 cm)
Colors	5	5
Packaging	8 yd ² / 16 Tiles	8 yd ² / 16 Tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar	Horizontal Brick Ashlar, Monolithic, Vertical Ashlar
Testing		
Dimensional Stability (Aachen Test)	Passes	
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm ²	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Methenamine Pill Test (ASTM D2859)	Passes	
Hexapod (ASTM D5252) TARR	3.5 - severe	
Environmental Data		
NSF/ANSI 140 Certification	Infinity [®] 2 Modular - Gold	
Recycled Content	Contains recycled content	
Indoor Air Quality	CRI Green Label Plus Certified	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information	
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered	
Warranty		
	Limited Lifetime Wear & Backing Warranty	
	Limited 15-Year XGUARD [®] Stain Resistant Warranty	
	Limited 15-Year ColorSafe [®] Bleach Resistant Warranty	

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Cut piles, cut and loops and tip-sheared constructions are not recommended for heavy commercial traffic, corridors or through channeled traffic. Please contact your Mannington Commercial representative for information regarding these constructions and your specific end use application
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.