



Spacia® Collection - Wood

**Mannington**  
COMMERCIAL



**Cover: Wood** (7.25" x 48") - Granary Oak SS5W3318, **Stone** (18" x 18") - Kingham Stone SS5S1594  
**Above: Wood** (6" x 36") - Windsor Oak Shore SS5W12373, **Color Anchor Collection Groove** (18" x 18") - Stone Wash C152



Wood (7.25" x 48") - Lancaster Oak SS5W100, Stone (18" x 18") - Peak SS5S2633



Wood (6" x 36") - Windsor Oak Ashen SS5W12372, Windsor Oak Chestnut SS5W12375,  
Edge Effects Wall Base Simplicity - Off White 244

Reception

Wood (7.25" x 48") - Muted Oak SS5W3312



# FRISKA

## WHAT WE ARE

We opened Friska with a mission to be your favourite place for delicious food and great coffee.

How our things taste is important, but we're also passionate about where there's a lot more to it.

From the fresh fruit to the free-range meat, responsible sourcing (100% free-range) and we employ people (cheerful) to our partnership with us, we think that there is a lot about Friska.

We hope you love the food and all the other stuff.

Griff and Ed



Wood (7.25" x 48") - Weathered Oak SS5W2524



Wood (7.25" x 48") - Drift Pine SS5W3027



### Design Solutions

Whether you're looking for design support from the start of a project or in the final phase, Mannington's Design Solutions team can help. Our team of designers is here to support you, our customers, through every step of the design process, from concept to installation.


---

### Your Vision Realized

Our team of designers with diverse backgrounds in interior design, graphic design and textile design will work with you to provide solutions, knowledge and options to simplify the design process and bring your vision to life.

### Deliverables

- > Product Palettes
- > 2D and 3D Renderings
- > Composites
- > Configurations
- > Finished Plans
- > Rendered Floor Plan
- > Estimates
- > Installation Diagrams
- > Revit Files
- > Construction Documents

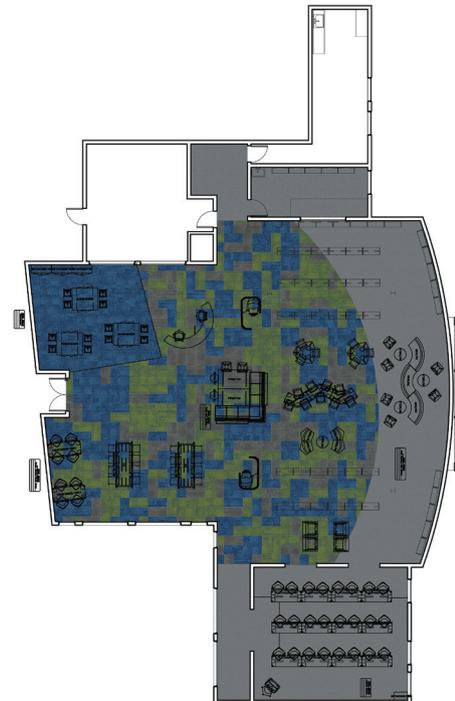



# Beautifully Made in North America

## **Crafted by the Industry Leader in LVT**

At Mannington Commercial, we proudly manufacture the vast majority of our LVT right here in North America, including Spacia. By controlling the process from start to finish, from design to material sourcing to delivery, we are able to bring you hard surface flooring products that are optimized to fit your needs.

## **Better Quality, Better Service**

- Product is holistically designed and engineered from the ground up
- More than a decade of domestically producing LVT
- A warranty you can count on
- Product Specific HPD and EPD
- Superior quality control in manufacturing

## **Big Picture Benefits**

- High-quality manufacturing jobs that sustain American communities
- Drastically reduced carbon footprint of domestic vs. international transport
- Adherence to practices ensuring workers' safety and environmental preservation
- Dedication to leading the industry in responsible, high-quality manufacturing

**Crafted with Purpose.**



### Edge Effects Wall Base Collection

An architectural accent, creating the elegant effect of a milled wood base without the expensive installation, indentations, scuffs, and abrasions. Requires no nailing, priming, or painting. Co-extruded thermoplastic rubber (type tp) engineered for flexible application to walls, corners, and columns.

---

### 36 Accord Colors

Plus 401 White, 137 Pearl, 157 Nougat, and 168 Bluish White

### 17 Styles

In a smooth, matte finish for a flawless look in any room.

### 7 Profile Heights

Style-dependent, in four thicknesses.

#### Sustainability

- > FloorScore
- > mindful MATERIALS
- > HPD

#### Warranty

- > Limited 5-Year Commercial



Cetera EECET



Illusion EEILL



Etched EEETC

*All styles are viewable online.*



**View Edge Effects Online**

# Defeat Damp Spaces

**Your job just got easier.** With our comprehensive moisture solutions for LVT, you can defeat the most extreme high moisture conditions.

**Best Solutions for:**

## Any Slab Condition

**NO Moisture Testing Required – NO RH limit, NO Testing\***

### Adhesive

---

MoistureLoc

**\* Conditions**

No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

**Best Solutions for:**

## Slabs with Intact Vapor Barrier (Class B or better)

**Quick pH Testing Required\*\***

### Adhesive

---

**pH**

V-88

12

MoistureLoc

None

QuickStix® with Moisture Resistant Primer\*\*

12

**\*\* Conditions**

Intact Class B or better vapor barrier | No hydrostatic pressure | No standing water or visible water stains | Slab is at least 45 days old

**Best Solutions for:**

## Unknown Slab Conditions

**Moisture Testing Required**

### Adhesive

---

**RH%**

**MVER**

**pH**

V-88

95

10

12

MoistureLoc

None

None

None

XpressStep LVT

98

10

12

QuickStix® with Premium Universal Primer (with IVB)

99

18

12

QuickStix® with Premium Universal Primer (No IVB)

95

10

12

V-95

85

5

9

IVB = Intact Vapor Barrier



**Abstract** – Grey Burnished Metal AR0ARH13, Polished Copper AR0APL45 in Large Parquet Laying Pattern

## Feature Stripping

Add contrast, create a grout effect or define tile and plank shapes with Amtico feature stripping. Available in a choice of five sizes.

Feature stripping is available in 2mm or 2.5mm. For stripping being used in beveled edge installations, 2.0mm stripping is recommended and for unbeveled edge installations, 2.5mm stripping is recommended.

*All Amtico Signature colors are available in stripping and can be used with any 2.5mm LVT.*

### Size Options:



1/8" x 36" (3.2 mm x 914.4 mm)



1/4" x 36" (6.4 mm x 914.4 mm)



3/8" x 36" (9.5 mm x 914.4 mm)



1/2" x 36" (12.7 mm x 914.4 mm)



3/4" x 36" (19.1 mm x 914.4 mm)

### Specialty stripping colors:



Pure Plain Black

AROAPN22



Pure Plain White

AROAPN11



Polished Copper

AROAPL45



Polished Gold

AROAPL78



Polished Silver

AROAPL32

\* Sizes shown are not actual size

# Fusion

## Rubber Transition Strip



When carpet and resilient flooring adjoin, there are often differences in product heights. Eliminate the problem with Fusion Rubber Transition Strips. Place Fusion Strips wherever carpet meets resilient flooring to create a subtle transition with minimal visual interruption. The compact strips are quick and easy to apply during flooring installation. The result is a safer, more attractive floor.

### Product Information

- Transition from 2.5 mm to 9.5 mm
- 10 Standard colors and Platinum Metallic 117
- Non-standard colors require a 5 carton minimum order
- 2.125" reduction width, 12' length
- 25 pieces of 12' sections per carton (300 lin ft)

### Compact Mixed Flooring Reducer

Fusion Rubber Transition Strips provide a 6-7 mm reduction over 2.125 inches that are easy to install.

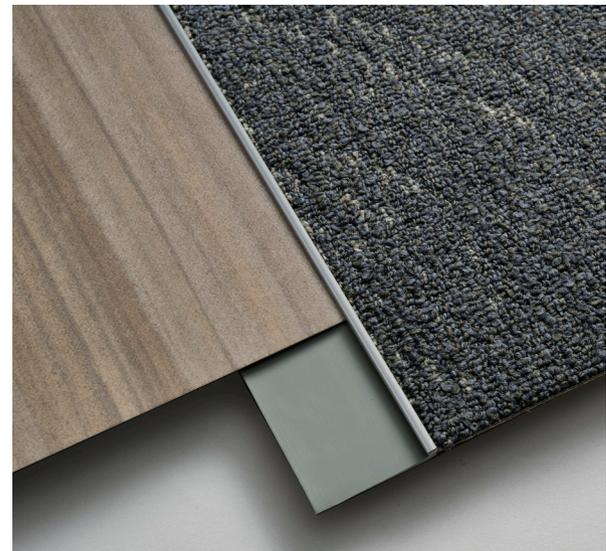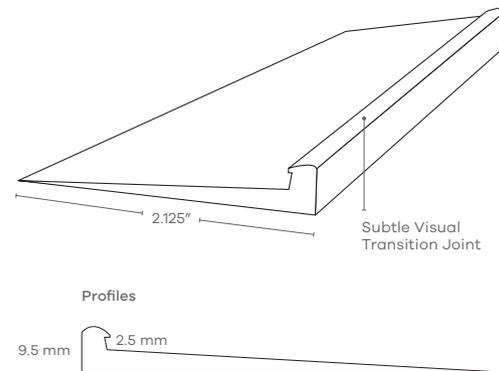

### Environmental Attributes

- FloorScore Certified; CDPH v 1.1 - 2010
- May contribute to LEED credits
- mindfulMaterials

# Spacia® Collection | Wood Product Availability

Product Name	SPACIA			SPACIA 4mm (2,000 ft² min)			Surface Finish - Tick	Surface Finish - Smooth Tick	Surface Finish - Barnwood	Quantum Guard Elite®	Micro-beveled Edges
	Product Code	6" x 36" (152.5 x 915 mm)	7.25" x 48" (184 x 1219 mm)	Product Code	6" x 36" (152.5 x 915 mm)	7.25" x 48" (184 x 1219 mm)					
Aged Timber	SS5W2651		•	S45W2651		•			•	•	•
American Walnut Cocoa	SS5W12126	•		S45W12126	•			•	•	•	•
American Walnut Natural	SS5W12124	•		S45W12124	•			•	•	•	•
American Walnut Saddle	SS5W12125	•		S45W12125	•			•	•	•	•
Bleached Elm	SS5W2516		•	S45W2516		•	•		•	•	•
Bruges Oak	SS5W3034		•	S45W3034		•		•	•	•	•
Carriage Oak	SS5W3316		•	S45W3316		•		•	•	•	•
Classic Cherry	SS5W2510		•	S45W2510		•	•		•	•	•
Coastal Pine	SS5W3029		•	S45W3029		•		•	•	•	•
Credenza Oak	SS5W3035		•	S45W3035		•		•	•	•	•
Drift Pine	SS5W3027		•	S45W3027		•		•	•	•	•
Dry Cedar	SS5W2535		•	S45W2535		•		•	•	•	•
Dusky Walnut	SS5W2542		•	S45W2542		•	•		•	•	•
Eden Oak	SS5W1010		•	S45W1010		•	•		•	•	•
Exotic Walnut	SS5W2541		•	S45W2541		•	•		•	•	•
Featured Oak	SS5W2533		•	S45W2533		•	•		•	•	•
Forge Oak	SS5W3317		•	S45W3317		•		•	•	•	•
Granary Oak	SS5W3318		•	S45W3318		•		•	•	•	•
Haven Oak	SS5W3033		•	S45W3033		•	•		•	•	•
Heritage Cherry Merlot	SS5W12107	•		S45W12107	•			•	•	•	•
Heritage Cherry Natural	SS5W12106	•		S45W12106	•			•	•	•	•
Heritage Cherry Select	SS5W12103	•		S45W12103	•			•	•	•	•
Honey Oak	SS5W2504		•	S45W2504		•	•		•	•	•
Inked Cedar	SS5W2552		•	S45W2552		•	•		•	•	•
Lancaster Oak	SS5W1100		•	S45W1100		•		•	•	•	•
Limed Wood Natural	SS5W2549		•	S45W2549		•	•		•	•	•
Madison Maple Creek	SS5W12238	•		S45W12238	•			•	•	•	•
Madison Maple Morgan	SS5W12236	•		S45W12236	•			•	•	•	•
Madison Maple Pepper Bark	SS5W12237	•		S45W12237	•			•	•	•	•
Malthouse Oak	SS5W3315		•	S45W3315		•		•	•	•	•
Merchant Wood	SS5W3026		•	S45W3026		•		•	•	•	•
Mulled Oak	SS5W3313		•	S45W3313		•		•	•	•	•
Muted Oak	SS5W3312		•	S45W3312		•		•	•	•	•
New England Oak	SS5W2527		•	S45W2527		•	•		•	•	•
Noble Oak	SS5W3030		•	S45W3030		•	•		•	•	•
Nordic Oak	SS5W2550		•	S45W2550		•	•		•	•	•
Northern Maple Autumn	SS5W12120	•		S45W12120	•			•	•	•	•
Northern Maple Natural	SS5W12119	•		S45W12119	•			•	•	•	•
Pale Ash	SS5W2518		•	S45W2518		•	•		•	•	•
Pale Cherry	SS5W2525		•	S45W2525		•	•		•	•	•
Powdered Oak	SS5W3311		•	S45W3311		•		•	•	•	•
Royal Oak	SS5W2530		•	S45W2530		•	•		•	•	•
Rustic Barn Wood	SS5W2513		•	S45W2513		•		•	•	•	•
Rustic Limed Wood	SS5W2650		•	S45W2650		•	•		•	•	•
Sash Oak	SS5W3032		•	S45W3032		•	•		•	•	•
Smoked Cedar	SS5W2536		•	S45W2536		•		•	•	•	•
Smoked Timber	SS5W2652		•	S45W2652		•		•	•	•	•
Smoothbark Hickory	SS5W2545		•	S45W2545		•	•		•	•	•
Spring Maple	SS5W2538		•	S45W2538		•	•		•	•	•
Sun Bleached Oak	SS5W2531		•	S45W2531		•		•	•	•	•

## Spacia Collection | Wood Product Availability



Wood (7.25" x 48") - Mulled Oak SS5W3313

Product Name	SPACIA			SPACIA 4mm (2,000 ft <sup>2</sup> min)			Surface Finish - Tick	Surface Finish - Smooth Tick	Surface Finish - Barn Wood	Quantum Guard Elite®	Micro-beveled Edges
	Product Code	6" x 36" (152.5 x 915 mm)	7.25" x 48" (184 x 1219 mm)	Product Code	6" x 36" (152.5 x 915 mm)	7.25" x 48" (184 x 1219 mm)					
Warm Cherry	SS5W2506		•	S45W2506		•	•			•	•
Warm Maple	SS5W2502		•	S45W2502		•	•			•	•
Warm Teak	SS5W2517		•	S45W2517		•	•			•	•
Warm Walnut	SS5W2543		•	S45W2543		•	•			•	•
Weathered Oak	SS5W2524		•	S45W2524		•			•	•	•
White Ash	SS5W2540		•	S45W2540		•			•	•	•
White Maple	SS5W2654		•	S45W2654		•	•			•	•
White Oak	SS5W2548		•	S45W2548		•	•			•	•
Windsor Oak Ashen	SS5W12372	•		S45W12372	•			•		•	•
Windsor Oak Chestnut	SS5W12375	•		S45W12375	•			•		•	•
Windsor Oak Gainsboro	SS5W12377	•		S45W12377	•			•		•	•
Windsor Oak Golden	SS5W12386	•		S45W12386	•			•		•	•
Windsor Oak Gunstock	SS5W12115	•		S45W12115	•			•		•	•
Windsor Oak Honeytone	SS5W12388	•		S45W12388	•			•		•	•
Windsor Oak Moleskin	SS5W12376	•		S45W12376	•			•		•	•
Windsor Oak Natural	SS5W12113	•		S45W12113	•			•		•	•
Windsor Oak Shore	SS5W12373	•		S45W12373	•			•		•	•
Worn Ash	SS5W2539		•	S45W2539		•			•	•	•



QUANTUM GUARD®  
*elite*

### Success Is in Our Science



Introducing an advancement in our proven Quantum Guard technology: Quantum Guard Elite. This patent pending technology provides the ultimate solution for all aspects of LVT performance.

- Highest scratch resistance in the industry
- Engineered for best-in-class dimensional stability
- Superior impact resistance
- Cuts cleanly for highest quality installation
- Easy no-polish maintenance significantly reduces overall life cycle cost and total cost of ownership
- Advanced stain resistance

### Outperforms in Scratch Resistance

Quantum Guard Elite


Leading Competitor

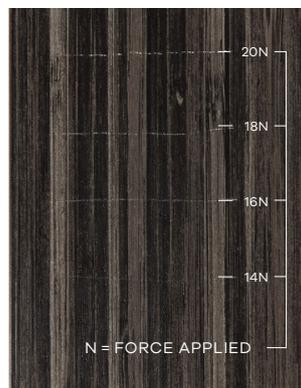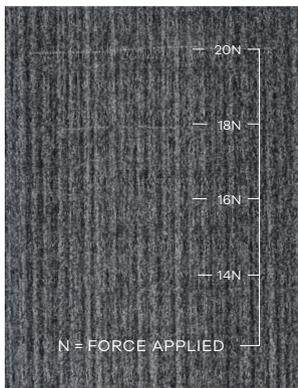

With a patent-pending two-part wear layer and aluminum oxide infused top coat, Quantum Guard Elite offers superior scratch resistance vs. the leading competitor.

### Complete Multi-Layered Protection



Quantum Guard Elite combines a hard wear layer and a flexible wear layer for superior durability with the added protection of our proprietary aluminum oxide technology.

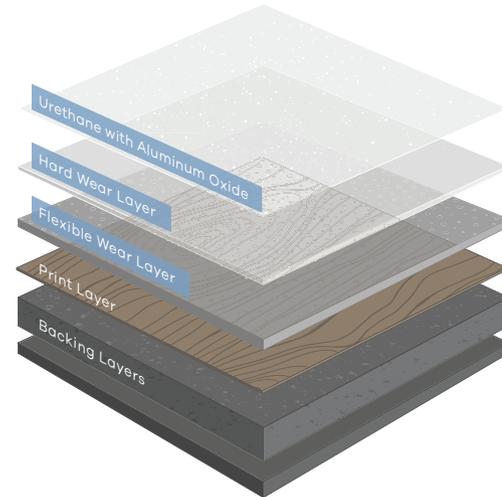

### Best-in-Class Dimensional Stability

Quantum Guard Elite

Leading Competitor



LVT with Quantum Guard Elite is fully engineered to offer the perfect balance of hardness and flexibility, which helps prevent product failures in commercial environments. Products exposed to 80 °C for six hours.

### Warranted to Work

Products with Quantum Guard Elite feature our Limited Quantum Guard Elite Wear Warranty and Limited Commercial Warranty.

**Spacia® Collection | Wood**

Style	Wood	4mm Wood
<b>Construction</b>	Luxury Vinyl Tile Non-ortho Phthalate	Luxury Vinyl Tile Non-ortho Phthalate
<b>Classification</b>	ASTM F1700 Class III, Type B	ASTM F1700 Class III, Type B
<b>Total Thickness</b>	0.098" (2.5 mm)	0.1575 (4.0 mm)
<b>Wear Layer Thickness</b>	20 mil (0.51 mm)	20 mil (0.51 mm)
<b>Wear Layer</b>	Quantum Guard Elite®	Quantum Guard Elite®
<b>Edge Treatment</b>	Micro-bevel	Micro-bevel
<b>Sizes</b>	6" x 36" (152.5 x 305 mm), 7.25" x 48" (184 x 1219 mm) Sizes are style dependent; refer to Product Availability Chart	6" x 36" (152.5 x 457 mm), 7.25" x 48" (184 x 1219 mm) Sizes are style dependent; refer to Product Availability Chart
<b>Colors</b>	68	68
<b>Packaging</b>	6" x 36" - 30 pcs, 45 ft <sup>2</sup> (4.18 m <sup>2</sup> ), 33.53 lbs (15.21 kg) 7.25" x 48" - 18 pcs, 43.5 ft <sup>2</sup> (4.04 m <sup>2</sup> ), 32.41 lbs (14.70 kg) Packaging may differ for QuickStix®	6" x 36" - 12 pcs, 18 ft <sup>2</sup> (1.67 m <sup>2</sup> ), 23.76 lbs (10.78 kg) 7.25" x 48" - 12 pcs, 29 ft <sup>2</sup> (2.694 m <sup>2</sup> ), 38.28 lbs (17.36 kg) QuickStix® Not Available
<b>Adhesive</b>	<b>Porous &amp; Non-porous Substrates:</b> V-88 Full Spread MoistureLoc Full Spread, One Component V-95 Full Spread, 2-part Epoxy XpressStep for LVT & Sheet Vinyl Full Coverage Spray <b>Note:</b> Must use V-95, MoistureLoc or XpressStep adhesive under hospital beds and heavy rolling load areas. In more abusive conditions such as areas subject to dragging force, direct sunlight or where topical moisture would be a concern, only V-95 or MoistureLoc should be used.	
<b>QuickStix®</b>	Available with QuickStix® pre-applied adhesive, reducing time and labor required to install the flooring. QuickStix® floors can be used immediately after installation, even in extreme moisture areas.	
<b>Installation Method</b>	All arrows in the same direction. Planks should have end joints offset by at least 6" and staggered to create a random appearance. Tiles should be installed block or staggered; when quarter turned, arrows should alternate.	
<b>Testing</b>		
HUD/FHA	Passes	
Flexibility (ASTM F137)	Passes - 1" Mandrel - No Crack/Break	
Dimensional Stability (ASTM F2199)	Passes - Max 0.020 in/lin ft	
Squareness (ASTM F2055)	Passes - Max 0.010"	
Static Load (ASTM F970 mod.)	Passes - 2,000 PSI; Residual Indent ≤ 0.005"	
Residual Indentation (ASTM F1914)	Passes - < 8% Avg / 10% Single Value	
Flooring Radiant Panel (ASTM E648)	Passes - Class 1; ≥ 0.45 watts/cm <sup>2</sup>	
Smoke Density (ASTM E662)	Passes - ≤ 450	
Slip Resistance (ASTM C1028)	Passes - ≥ 0.5 Leather; 0.6 Rubber	
Resistance to Light (ASTM F1515)	Passes	
Chemical Resistance (ASTM F925)	Passes	
Resistance to Heat (ASTM F1514)	Passes	
<b>Environmental Data</b>		
Rapidly Renewable Content	Contains 2% rapidly renewable resource content	
Indoor Air Quality	FloorScore Certified; CDPH v1.2-2017	
Product Declarations	Third Party Verified EPD, HPD	
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information	
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs Building Product Disclosure & Optimization - Sourcing Raw Materials Building Product Disclosure & Optimization - Material Ingredients; IEQc2 - Low Emitting Materials	
mindful MATERIALS	Visit <a href="http://mindfulmaterials.com">mindfulmaterials.com</a> for current transparency information	
Manufacturing	Madison, GA (USA) - ISO 14001 EMS & ISO 9001 QMS Registered, +Vantage Vinyl Verified Silver	
<b>Warranty</b>		
	Limited 15-Year Commercial Warranty Limited 15-Year Quantum Guard Elite® Wear Warranty	